



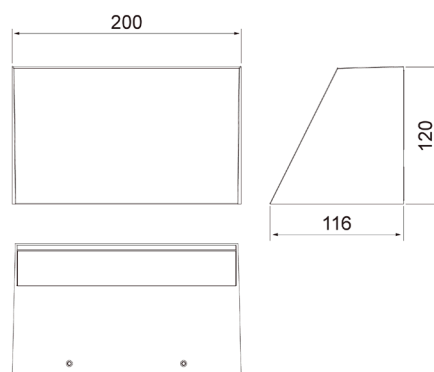

## Alupack

Alupack is a wall luminaire with a wide light distribution. This makes it an excellent choice for walkways. Thanks to its compact size, it is also suitable for façade lighting and above doorways. The colour temperature can be selected from two options during installation. By combining different models of Airam outdoor luminaires, you can create a harmonious overall look for your project. The product ranges share a common colour selection, high-quality materials, modern design and easy installation.

- Aluminium body, UV-protected polycarbonate diffuser.
- Black RAL 9005, grey RAL 7024 and white RAL 9016.
- Protection class I.
- Surface-mounted wall installation.
- Suitable for through-wiring 3 x 1.5/2.5 mm<sup>2</sup>.
- CCT 3000 K / 4000 K selectable from the luminaire. CRI > 80 / Ra > 80.
- Integrated LED 10 W / 940 lm.
- MacAdam 3 SDCM.
- IP65.
- IK06.
- Dimming: rising- and trailing-edge control.
- Ambient temperature range -35 ... 25 °C.
- Rated life time L80B50 100 000 h (Ta25°C).

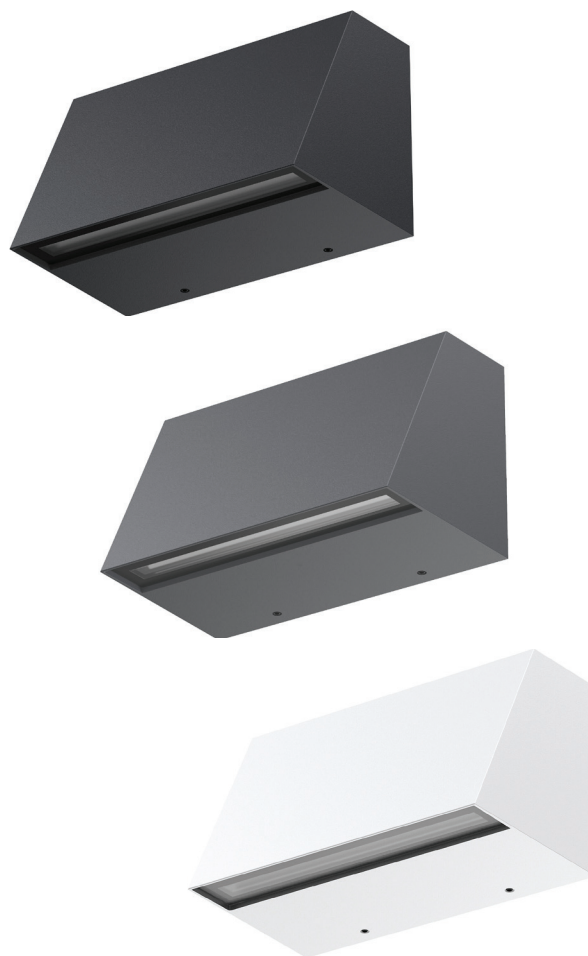

• In stock

### Alupack

| NO.       | CODE   |                              | W  | LM  |
|-----------|--------|------------------------------|----|-----|
| • 4546573 | 100109 | IP65 940lm 830/840 DIM GL BK | 10 | 940 |
| • 4546574 | 100105 | IP65 940lm 830/840 DIM GL GR | 10 | 940 |
| • 4546575 | 100108 | IP65 940lm 830/840 DIM GL WH | 10 | 940 |

