



Halo Basic

Halo Basic is a cost-effective, high-output wall luminaire that is also dimmable. It can also be installed on the ceiling and under canopies. The colour temperature can be selected from three options and the output from four options during installation. The package also includes an eyelid visor. By combining different models of Airam outdoor luminaires, you can create a harmonious overall look for your project. The product ranges share a common colour selection, high-quality materials, modern design and easy installation.

- UV-protected opal polycarbonate body and diffuser.
- Black RAL 9005, grey RAL 7024 and white RAL 9016.
- Protection class II.
- Ceiling or wall mounting.
- Suitable for through-wiring 3 x 1.5/2.5 mm².
- CCT 3000 K / 3500 K / 4000 K selectable from the luminaire. CRI > 80 / Ra > 80.
- Integrated led 23 W 2600 lm. Power selection 9 W 1000 lm / 14 W 1550 lm / 18 W 2000 lm / 23 W 2600 lm.
- MacAdam 3 SDCM.
- IP65.
- IK10.
- Dimming: rising- and trailing-edge control.
- Ambient temperature range -35 ... 25 °C.
- Rated life time L80B50 100 000 h (Ta25°C).

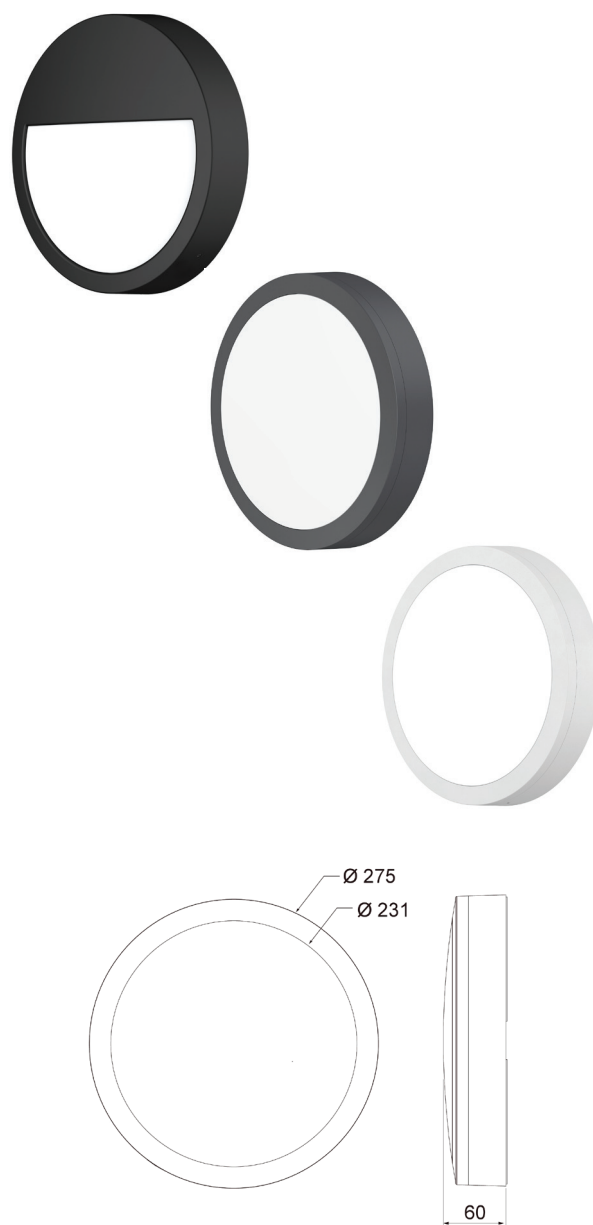

• In stock

Halo Basic

NO.	CODE		W	LM
• 4546576	100106	IP65 2600lm 830/840 PCO BK	23	2600
• 4546577	100110	IP65 2600lm 830/840 PCO GR	23	2600
• 4546578	100111	IP65 2600lm 830/840 PCO WH	23	2600