
IP20 | 3 x 2,5 | 5 x 2,5 | DALI-2 | 5 year guarantee

Office ML




Surface-mounted Office ML is a comprehensive range of general-purpose luminaires with versatile customisation options and multilumen power adjustment (ML). The luminaire features a low-luminance aluminium louvre and an integrated opal diffuser, which eliminate disturbing glare from the LEDs and provide a low UGR < 19. Typical applications include schools, offices and other spaces intended for display screen work.

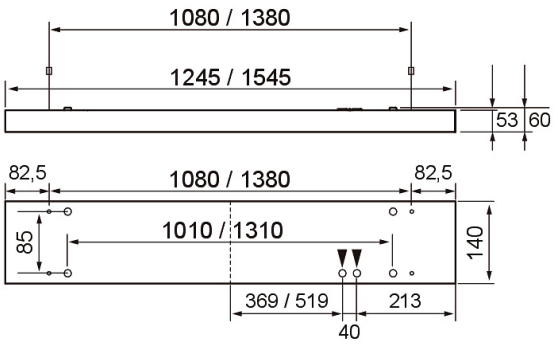

- Steel housing, low-luminance louvre made of anodised aluminium.
- White, RAL 9016.
- Protection class I.
- Surface mounting to the ceiling or wall. Mounting on a suspension rail with additional accessories.
- Linkable, 3 x 2,5 mm^2, Dali-versions 5 x 2,5 mm^2.
- Integrated LED:
  1245 mm 28 W 3500 lm / 32 W 3900 lm / 36 W 4350 lm / 42 W 5000 lm.
  1545 mm 38 W 4700 lm / 44 W 5300 lm / 50 W 5900 lm / 59 W 6800 lm.
- Colour temperatures 3000 K and 4000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off, Dali-2, with pushbutton control 230V and CLO-function.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L80 100,000 h (Ta25°C).
- Rated lifetime L90 80,000 h (Ta25°C).
- A universal trail bracket for a 70 mm suspension rail (D2ARKI) and universal suspension wire (4107113).





- Also available in color temperatures 2700 K, 5000 K and 6500 K. CRI > 90 available for order. Project-specific luminous flux packages available on request. High-gloss louvre optics are available for the luminaire by special order. Available color options are also grey (RAL 9007) or black. Available with one pull switch, on/off and Dim. Available with a single pull switch, on/off and Dim.

By order, • In stock

Office ML

	NO.	CODE	W	LM
	4147075	100808 1245 5000lm 830	42	5000
•	4147081	100814 1245 5000lm 840	42	5000
	4147082	100815 1545 6800lm 830	59	6800
•	4147073	100806 1545 6800lm 840	59	6800


Office ML Dali

	NO.	CODE	W	LM
	4147076	100809 1245 5000lm 830 DA2	42	5000
•	4147078	100811 1245 5000lm 840 DA2	42	5000
	4147080	100813 1545 6800lm 830 DA2	59	6800
•	4147077	100810 1545 6800lm 840 DA2	59	6800



Universal Trail Bracket 70 white 85 mm

	NO.	CODE
•		D2ARKI UNIV. RAIL BRACKET 70 WH/85MM



Universal Suspension Wire

	NO.	CODE
•	4107113	D2VAYL Suspension wire universal