
IP20 | 5 x 1 | DALI-2 | 5 year guarantee

Office D/I ML

The suspended Office D/I ML is a range of office luminaires with direct and indirect light, where the uplight and downlight are controlled simultaneously by a single driver. Thanks to its modular construction, the luminaire offers versatile customisation options. The luminaire features an aluminium low-luminance louvre and an integrated opal shield, which eliminate glare from the LEDs and provide a low UGR of < 19. All models in the range have four power levels selectable via the driver. Typical applications include schools, offices and other spaces intended for display screen work.




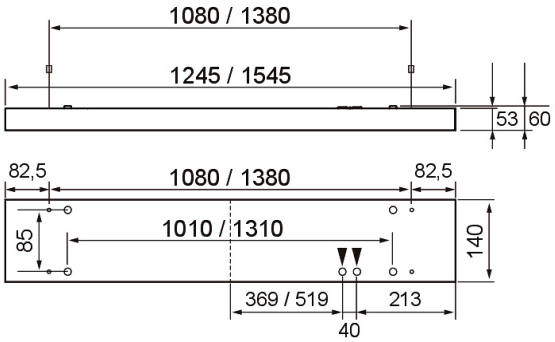

- Steel housing, low-luminance louvre made of anodised aluminium. Acrylic uplight cover.
- White, RAL 9016.
- Protection class I.
- Suspension mounting, wire suspension kits available as accessories.
- Integrated LED:
  Diffused light 1245 mm, uplight 45 %: 38 W 4900 lm / 42 W 5300 lm / 45 W 5700 lm / 49 W 6100 lm.
  Diffused light 1545 mm, uplight 45 %: 48 W 6500 lm / 52 W 7000 lm / 56 W 7500 lm / 61 W 8000 lm.
- Colour temperatures 3000 K and 4000 K.
  CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off, Dali-2, with pushbutton control 230V and CLO-function. In the standard models, the uplight and downlight are controlled simultaneously.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L80 100 000 h (Ta25°C).
- Rated lifetime L90 80 000 h (Ta25°C).
- Wire suspension kits 4107113 and 4146595 as accessories.

- Also available in color temperatures 2700 K, 5000 K and 6500 K. CRI > 90 available for order. Project-specific luminous flux packages available on request. High-gloss louvre optics are available for the luminaire by special order. Available color options are also grey (RAL 9007) or black. Available with a single pull switch, on/off and Dim. Separate control of downlight and uplight with two pull switches, on/off and Dim.






By order, • In stock

Office D/I ML

NO.	CODE		W	LM
4147079	100812	1245 6100lm 55/45 830	49	6100
4147074	100807	1245 6100lm 55/45 840	49	6100
4147083	100816	1545 8000lm 55/45 830	61	8000
4147085	100818	1545 8000lm 55/45 840	61	8000

Office D/I ML Dali

NO.	CODE		W	LM
4147084	100817	1245 6100lm 55/45 830 DA2	49	6100
• 4147088	100821	1245 6100lm 55/45 840 DA2	49	6100
4147086	100819	1545 8000lm 55/45 830 DA2	61	8000
• 4147087	100820	1545 8000lm 55/45 840 DA2	61	8000



Universal Suspension Wire

NO.	CODE	
• 4107113	D2VAYL	Suspension wire universal



Universal 4-wire Suspension

NO.	CODE	
• 4146595	D2YRIP	Universal 4-wire suspension