





## Ares

An aluminium bollard luminaire for outdoor use, such as in front of office premises. The Ares bollard is available with an integrated LED and replaceable E27 lamp. The luminaire has a frosted polycarbonate diffuser with excellent impact resistance. High-quality surface treatment, stainless steel screws. Installation with bolt fastening directly to a concrete slab or with a separate mounting base on a readymade concrete base. The ground-mounting tube and light sources for the E27 model available only via separate order.

- Aluminium housing and frosted polycarbonate diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Screw terminal block 3 x 2.5 mm<sup>2</sup>, one cable feed-through.
- Integrated LED 20 W, 375–390 lm.
- Colour temperatures of the integrated LED 3,000 K and 4,000 K. CRI > 80 / Ra > 80.
- E27 models LED lamp max 11 W, not included.
- Lamp recommendations: Airam Frost led -range.
- IP55.
- IK10.
- On/off.
- Ambient temperature range -20 ... 25 °C.
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white, PC = polycarbonate, FR = frosted diffuser.

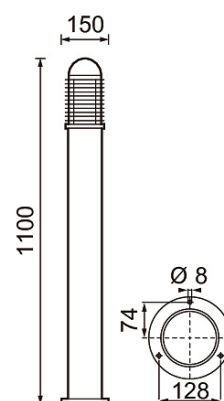

By order

### Ares 830

NO.	CODE	W	LM
4510274	B5ARBD IP55 IK10 20W/830 PCFR ANT	20	375
4510275	B5ARBC IP55 IK10 20W/830 PCFR SI	20	375
4510276	B5ARBB IP55 IK10 20W/830 PCFR BK	20	375
4510277	B5ARBA IP55 IK10 20W/830 PCFR WH	20	375

### Ares 840

NO.	CODE	W	LM
4513115	B5ARDD IP55 IK10 20W/840 PCFR ANT	20	390
4513116	B5ARDC IP55 IK10 20W/840 PCFR SI	20	390
4513117	B5ARDB IP55 IK10 20W/840 PCFR BK	20	390
4513118	B5ARDA IP55 IK10 20W/840 PCFR WH	20	390

### Ares E27

NO.	CODE	W
4508482	B5ARAV IP55 IK10 E27 PCFR ANT	11
4508481	B5ARAU IP55 IK10 E27 PCFR SI	11
4508480	B5ARAT IP55 IK10 E27 PCFR BK	11
4508479	B5ARAS IP55 IK10 E27 PCFR WH	11