IP20 | 3 x 2,5 | 5 x 2,5 | DALI-2

Ballo

Elegant Ballo luminaire made from high-quality glass is an ideal choice for offices, lobbies and other public spaces. Ballo is available in two different color temperatures. The package includes a two-metre cable and ceiling cup. The cable can be shortened to up to 150 mm.

- Steel housing and opal glass diffuser (GLO).
- Chrome.
- Protection class I.
- Suspension mounting. Suspension length 150–2,000 mm.
- Linkable, 3 x 2.5 mm^2, Dali-2-models 5 x 2.5 mm^2.
- Installation height 2–6 m
- Fixed LED: 39 W / 4100 lm.
- Colour temperatures: 3000 K and 4000 K.
  CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- On/off and Dali-2.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100 000 h (Ta25°C).
- Rated lifetime L80 65 000 h (Ta25°C).
- Power source service life 50 000 h.

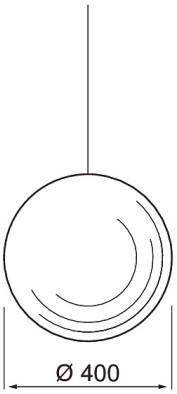

- Also available as Casambi, 1–10 V and Switch Dim solutions. The colour temperature options available are: 2700 K, 5700 K and 6500 K as well as Tunable White. CRI > 90 available by special order. Also available with various connecting wire solutions.



By order

Ballo

NO.	CODE		W	LM
4289839	D2BABA	400 IP20 39W/830 GLO	39	4100
4289840	D2BABB	400 IP20 39W/840 GLO	39	4100

Ballo Dali

NO.	CODE		W	LM
	D2BABA-DALI	400 IP20 39W/830 DA2 GLO	39	4100
	D2BABB-DALI	400 IP20 39W/840 DA2 GLO	39	4100