



Best Clean

For hospitals and other public-space applications where IP65 protection is required. Corrosion-resistant. The hardened, opal glass diffuser is loosened with the Best Clean suction cup (4207374), which is available via separate order. Available in two sizes, outputs and colour temperatures. The luminaire offers an excellent colour rendering index, CRI 90. The Best Clean luminaires have been certified in accordance with the ISO 14644-1 standard and they have been granted the ISO 3 cleanroom classification.

- Steel housing and opal glass diffuser (GLO).
- White RAL 9003.
- Protection class I.
- Recessed mounting on a T-grid ceiling.
- Linkable, 3/5 x 2.5 mm²
- Installation height: 2–4 m.
- Fixed LED: 39–54 W / 4900–6600 lm.
- Colour temperatures: 3000 K and 4000 K
CRI > 90 / Ra > 90.
- MacAdam 3 SDCM.
- IP65.
- The standard range includes on/off and Dali-2 models.
- Ambient temperature range: 0 ... 25 °C.
- Rated lifetime: L80 100,000 h (Ta 25 °C).
- Power source lifespan: 100,000 h. Tc < 65 °C.
- Suction pad as an accessory.
- DA = Dali-2.
- Micro-prismatic versions, surface-mounted and emergency light models, 1–10V solutions and push-button controlled versions are available on a project-specific basis. Also available in sizes 600 x 1200 mm and 300 x 1,500 mm. CRI > 80 available by special order The colour temperature options available are: 2700 K, 5700 K and 6500 K as well as Tunable White. Recessed mounting and concealed grid installation accessories are available for the luminaires. A version with a glass diffuser and a reflector grid is also available.

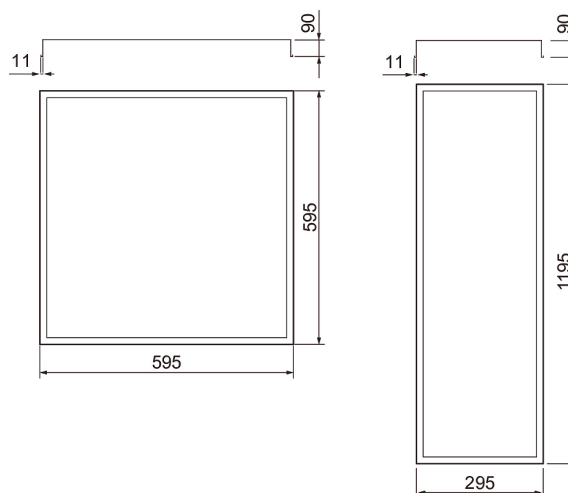

Suction pad as an accessory.

By order

Best Clean 600 x 600

NO.	CODE	W	LM
4207204	E2BCAA 600x600 IP65 39W/930 GLO	39	4165
4207205	E2BCAB 600x600 IP65 39W/940 GLO	39	4165
4207208	E2BCAE 600x600 IP65 54W/930 GLO	54	5568
4207209	E2BCAF 600x600 IP65 54W/940 GLO	54	5568

Best Clean 1200 x 300

NO.	CODE	W	LM
4207212	E2BCCA 1200x300 IP65 39W/930 GLO	39	4038
4207213	E2BCCB 1200x300 IP65 39W/940 GLO	39	4038
4207216	E2BCC2 1200x300 IP65 54W/930 GLO	54	5355
4207217	E2BCCF 1200x300 IP65 54W/940 GLO	54	5355

Best Clean Dali 600 x 600

NO.	CODE	W	LM
4207206	E2BCAC 600x600 IP65 39W/930 DA2 GLO	39	4165
4207207	E2BCAD 600x600 IP65 39W/940 DA2 GLO	39	4165
4207375	E2BCAG 600x600 IP65 54W/930 DA2 GLO	54	5568
4207211	E2BCAH 600x600 IP65 54W/940 DA2 GLO	54	5568

Best Clean Dali 1200 x 300

NO.	CODE	W	LM
4207214	E2BCCC 1200x300 IP65 39W/930 DA2 GLO	39	4038
4207215	E2BCCD 1200x300 IP65 39W/940 DA2 GLO	39	4038
4207218	E2BCCG 1200x300 IP65 54W/930 DA2 GLO	54	5355
4207219	E2BCCH 1200x300 IP65 54W/940 DA2 GLO	54	5355