





Blitz M Double

Blitz Sq M Double is a surface-mounted wall luminaire with a rectangular design, and it distributes light in two directions. The luminaire is suitable for indoor and outdoor use. Integrated LED. Available with three different beams. High-quality surface treatment, stainless steel screws.



- Aluminium housing and transparent glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm².
- Installation height 0.5–4 m.
- Luminous flux 3180–3580 lm.
- Connected load 31W.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 25 °C
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.
- Also available in Corten colour on a project-specific basis.

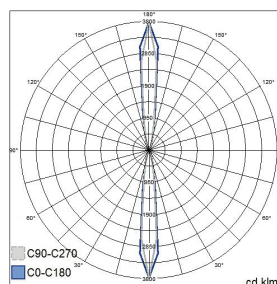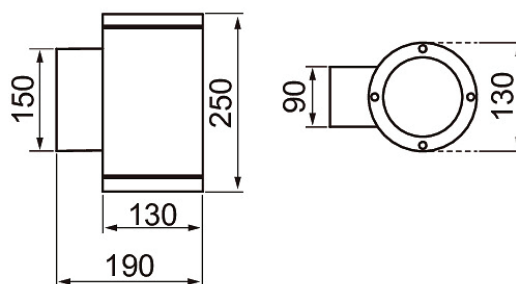

By order

Blitz M Double anthracite

NO.	CODE	W	LM
4511516	B5BZGA IP65 31W/830 16D GLC ANT	31	3180
4511526	B5BZJA IP65 31W/830 40D GLC ANT	31	3290
4511536	B5BZLA IP65 31W/830 74D GLC ANT	31	3400
4511521	B5BZHA IP65 31W/840 16D GLC ANT	31	3350
4511531	B5BZKA IP65 31W/840 40D GLC ANT	31	3460
4511541	B5BZMA IP65 31W/840 74D GLC ANT	31	3580

Blitz M Double white

NO.	CODE	W	LM
4511519	B5BZGD IP65 31W/830 16D GLC WH	31	3180
4511529	B5BZJD IP65 31W/830 40D GLC WH	31	3290
4511539	B5BZLD IP65 31W/830 74D GLC WH	31	3400
4511524	B5BZHD IP65 31W/840 16D GLC WH	31	3350
4511534	B5BZKD IP65 31W/840 40D GLC WH	31	3460
4511544	B5BZMD IP65 31W/840 74D GLC WH	31	3580

Blitz M Double black

NO.	CODE	W	LM
4511518	B5BZGC IP65 31W/830 16D GLC BK	31	3180
4511528	B5BZJC IP65 31W/830 40D GLC BK	31	3290
4511538	B5BZLC IP65 31W/830 74D GLC BK	31	3400
4511523	B5BZHC IP65 31W/840 16D GLC BK	31	3350
4511533	B5BZKC IP65 31W/840 40D GLC BK	31	3460
4511543	B5BZMC IP65 31W/840 74D GLC BK	31	3580

Blitz M Double silver

NO.	CODE	W	LM
4511517	B5BZGB IP65 31W/830 16D GLC SI	31	3180
4511522	B5BZHB IP65 31W/840 16D GLC SI	31	3350
4511527	B5BZJB IP65 31W/830 40D GLC SI	31	3290
4511532	B5BZKB IP65 31W/840 40D GLC SI	31	3460
4511537	B5BZLB IP65 31W/830 74D GLC SI	31	3400
4511542	B5BZMB IP65 31W/840 74D GLC SI	31	3580