





Blitz M

Blitz M is a wall luminaire suitable for indoor and outdoor use. It is equipped with an integrated LED, which distributes light downwards. Available with various beam angles. High-quality surface treatment, stainless steel screws. The luminaire housing is coated with polyester paint that is resistant to corrosion and UV radiation.



- Aluminium housing and transparent glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm².
- Installation height 0–4 m.
- Integrated LED 16 W / 1,590–1,790 lm.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 25 °C
- Rated lifetime L70 50,000 h
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.
- Also available in Corten colour on a project-specific basis.

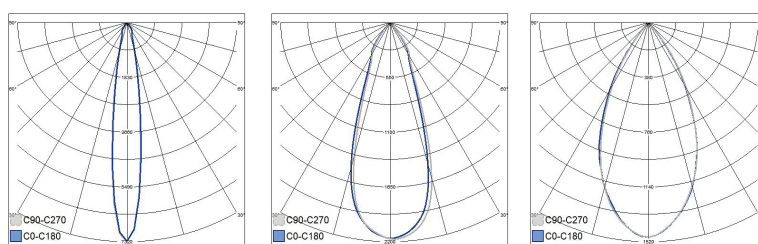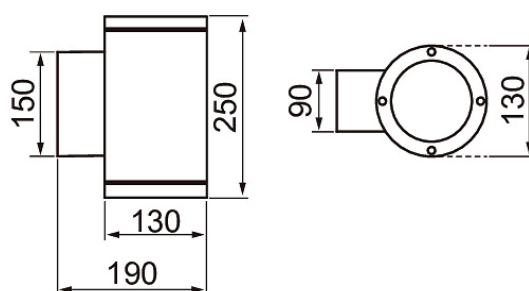

By order

Blitz M anthracite

NO.	CODE	W	LM
4510286	B5BZAA IP65 16W/830 16D GLC ANT	16	1590
4510296	B5BZCA IP65 16W/830 40D GLC ANT	16	1645
4511506	B5BZEA IP65 16W/830 74D GLC ANT	16	1700
4510291	B5BZBA IP65 16W/840 16D GLC ANT	16	1675
4511501	B5BZDA IP65 16W/840 40D GLC ANT	16	1730
4511511	B5BZFA IP65 16W/840 74D GLC ANT	16	1790

Blitz M black

NO.	CODE	W	LM
4510288	B5BZAC IP65 16W/830 16D GLC BK	16	1590
4510298	B5BZCC IP65 16W/830 40D GLC BK	16	1645
4511508	B5BZEC IP65 16W/830 74D GLC BK	16	1700
4510293	B5BZBC IP65 16W/840 16D GLC BK	16	1675
4511503	B5BZDC IP65 16W/840 40D GLC BK	16	1730
4511513	B5BZFC IP65 16W/840 74D GLC BK	16	1790

Blitz M white

NO.	CODE	W	LM
4510289	B5BZAD IP65 16W/830 16D GLC WH	16	1590
4510299	B5BZCD IP65 16W/830 40D GLC WH	16	1645
4511509	B5BZED IP65 16W/830 74D GLC WH	16	1700
4510294	B5BZBD IP65 16W/840 16D GLC WH	16	1675
4511504	B5BZDD IP65 16W/840 40D GLC WH	16	1730
4511514	B5BZFD IP65 16W/840 74D GLC WH	16	1790

Blitz M silver

NO.	CODE	W	LM
4510287	B5BZAB IP65 16W/830 16D GLC SI	16	1590
4510297	B5BZCB IP65 16W/830 40D GLC SI	16	1645
4511507	B5BZEB IP65 16W/830 74D GLC SI	16	1700
4510292	B5BZBB IP65 16W/840 16D GLC SI	16	1675
4511502	B5BZDB IP65 16W/840 40D GLC SI	16	1730
4511512	B5BZFB IP65 16W/840 74D GLC SI	16	1790