





Blitz Sq M Ceiling

Blitz Sq M Ceiling is a surface-mounted ceiling luminaire with a rectangular design. The luminaire is suitable for indoor and outdoor use. Integrated LED. High-quality surface treatment, stainless steel screws.

- Aluminium housing and transparent glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm².
- Installation height 0.5–4 m.
- Integrated LED 18W / 1665–1750 lm.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 25 °C.
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.
- Also available in Corten colour on a project-specific basis.

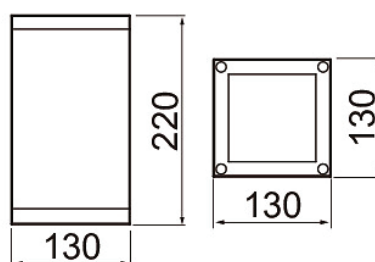

By order

Blitz Sq M Ceiling anthracite

NO.	CODE	W	LM
4511646	B5BQNA IP65 18W/830 GLC ANT Sq	18	1665
4511651	B5BQQA IP65 18W/840 GLC ANT Sq	18	1750

Blitz Sq M Ceiling black

NO.	CODE	W	LM
4511648	B5BQNC IP65 18W/830 GLC BK Sq	18	1665
4511653	B5BQOC IP65 18W/840 GLC BK Sq	18	1750

Blitz Sq M Ceiling white

NO.	CODE	W	LM
4511649	B5BQND IP65 18W/830 GLC WH Sq	18	1665
4511654	B5BQOD IP65 18W/840 GLC WH Sq	18	1750

Blitz Sq M Ceiling silver

NO.	CODE	W	LM
4511647	B5BQNB IP65 18W/830 GLC SI Sq	18	1665
4511652	B5BQOB IP65 18W/840 GLC SI Sq	18	1750