



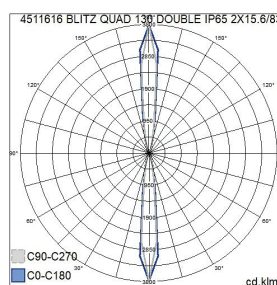

## Blitz Sq M Double

Blitz Sq M Double is a surface-mounted wall luminaire with a rectangular design, and it distributes light in two directions. The luminaire is suitable for indoor and outdoor use. Integrated LED. Available with three different beams. High-quality surface treatment, stainless steel screws.

- Aluminium housing and transparent glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm<sup>2</sup>.
- Installation height 0.5–4 m.
- Integrated LED 31W / 3180–3580 lm.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 25 °C
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.
- Also available in Corten colour on a project-specific basis.

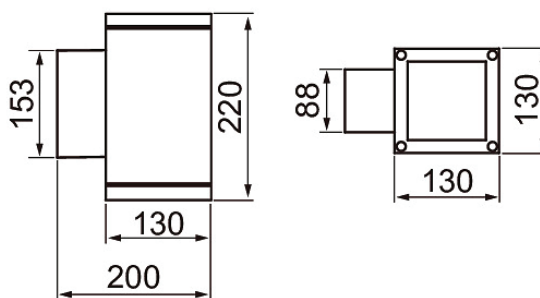

By order

### Blitz Sq M Double anthracite

NO.	CODE	W	LM
4511616	B5BQGA IP65 31W/830 16D GLC ANT Sq	31	3180
4511626	B5BQJA IP65 31W/830 40D GLC ANT Sq	31	3290
4511636	B5BQLA IP65 31W/830 74D GLC ANT Sq	31	3400
4511621	B5BQHA IP65 31W/840 16D GLC ANT Sq	31	3350
4511631	B5BQKA IP65 31W/840 40D GLC ANT Sq	31	3460
4511641	B5BQMA IP65 31W/840 74D GLC ANT Sq	31	3580

### Blitz Sq M Double black

NO.	CODE	W	LM
4511618	B5BQGC IP65 31W/830 16D GLC BK Sq	31	3180
4511628	B5BQJC IP65 31W/830 40D GLC BK Sq	31	3290
4511638	B5BQLC IP65 31W/830 74D GLC BK Sq	31	3400
4511623	B5BQHC IP65 31W/840 16D GLC BK Sq	31	3350
4511633	B5BQKC IP65 31W/840 40D GLC BK Sq	31	3460
4511643	B5BQMC IP65 31W/840 74D GLC BK Sq	31	3580

### Blitz Sq M Double white

NO.	CODE	W	LM
4511619	B5BQGD IP65 31W/830 16D GLC WH Sq	31	3180
4511629	B5BQJD IP65 31W/830 40D GLC WH Sq	31	3290
4511639	B5BQLD IP65 31W/830 74D GLC WH Sq	31	3400
4511624	B5BQHD IP65 31W/840 16D GLC WH Sq	31	3350
4511634	B5BQKD IP65 31W/840 40D GLC WH Sq	31	3460
4511644	B5BQMD IP65 31W/840 74D GLC WH Sq	31	3580

### Blitz Sq M Double silver

NO.	CODE	W	LM
4511617	B5BQGB IP65 31W/830 16D GLC SI Sq	31	3180
4511627	B5BQJB IP65 31W/830 40D GLC SI Sq	31	3290
4511637	B5BQLB IP65 31W/830 74D GLC SI Sq	31	3400
4511622	B5BQHB IP65 31W/840 16D GLC SI Sq	31	3350
4511632	B5BQKB IP65 31W/840 40D GLC SI Sq	31	3460
4511642	B5BQMB IP65 31W/840 74D GLC SI Sq	31	3580