





## Blitz Sq M

Blitz Sq M is a surface-mounted wall luminaire with a rectangular design. The luminaire is suitable for indoor and outdoor use. It is equipped with an integrated LED, which distributes light downwards. Available with three different beams. High-quality surface treatment, stainless steel screws.



- Aluminium housing and transparent glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm<sup>2</sup>.
- Installation height 0.5–4 m.
- Integrated LED 16W / 1590–1790 lm.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 25 °C
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.
- Also available in Corten colour on a project-specific basis.

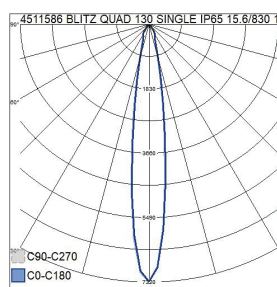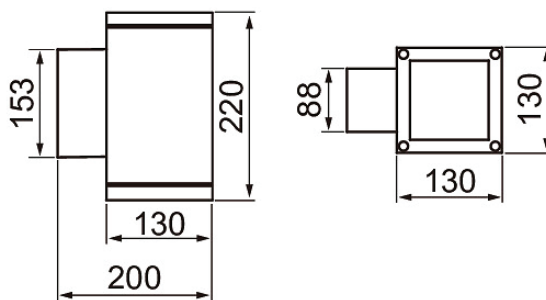

By order

### Blitz Sq M anthracite

NO.	CODE	W	LM
4511586	B5BQAA IP65 16W/830 16D GLC ANT Sq	16	1590
4511596	B5BQCA IP65 16W/830 40D GLC ANT Sq	16	1645
4511606	B5BQEA IP65 16W/830 74D GLC ANT Sq	16	1700
4511591	B5BQBA IP65 16W/840 16D GLC ANT Sq	16	1675
4511601	B5BQDA IP65 16W/840 40D GLC ANT Sq	16	1730
4511611	B5BQFA IP65 16W/840 74D GLC ANT Sq	16	1790

### Blitz Sq M black

NO.	CODE	W	LM
4511588	B5BQAC IP65 16W/830 16D GLC BK Sq	16	1590
4511598	B5BQCC IP65 16W/830 40D GLC BK Sq	16	1645
4511608	B5BQEC IP65 16W/830 74D GLC BK Sq	16	1700
4511593	B5BQBC IP65 16W/840 16D GLC BK Sq	16	1675
4511603	B5BQDC IP65 16W/840 40D GLC BK Sq	16	1730
4511613	B5BQFC IP65 16W/840 74D GLC BK Sq	16	1790

### Blitz Sq M white

NO.	CODE	W	LM
4511589	B5BQAD IP65 16W/830 16D GLC WH Sq	16	1590
4511599	B5BQCD IP65 16W/830 40D GLC WH Sq	16	1645
4511609	B5BQED IP65 16W/830 74D GLC WH Sq	16	1700
4511594	B5BQBD IP65 16W/840 16D GLC WH Sq	16	1675
4511604	B5BQDD IP65 16W/840 40D GLC WH Sq	16	1730
4511614	B5BQFD IP65 16W/840 74D GLC WH Sq	16	1790

### Blitz Sq M silver

NO.	CODE	W	LM
4511587	B5BQAB IP65 16W/830 16D GLC SI Sq	16	1590
4511597	B5BQCB IP65 16W/830 40D GLC SI Sq	16	1645
4511607	B5BQEB IP65 16W/830 74D GLC SI Sq	16	1700
4511592	B5BQBB IP65 16W/840 16D GLC SI Sq	16	1675
4511602	B5BQDB IP65 16W/840 40D GLC SI Sq	16	1730
4511612	B5BQFB IP65 16W/840 74D GLC SI Sq	16	1790