

IP44



-O-  
3 x 2,5-O-  
5 x 2,5

DALI-2

## Bruno

A lighting solution for general lighting in staircases, hallways, walk-in wardrobes and bathrooms. The Bruno ceiling light comes in three sizes and output options. The largest models are also available with Dali control. With its even light distribution, the luminaire is suitable for a wide range of general lighting applications. Wireless solutions and a model with PIR-sensors are available via special order.

- Painted steel housing and opal acrylic diffuser (ACO).
- White, RAL 9003.
- Protection class I.
- Surface mounting on a ceiling.
- Linkable, 3/5 x 2.5 mm<sup>2</sup>.
- Installation height 2–4 m.
- Integrated LED 14–34W / 1,400–3,600 lm.
- Colour temperatures 3,000 K and 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP44.
- The standard range includes on/off, Radar and Dali-2 models with push-button control (230 V).
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100,000 h (Ta25°C).
- Rated lifetime L80 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- WH = white, DA2 = Dali-2.
- Also available as Casambi, 1–10 V and Switch Dim solutions and equipped with a PIR sensor. The colour temperature options available are: 2,700 K, 5,700 K and 6,500 K as well as Tunable White. CRI > 90 available by special order. Also available in an emergency light model.

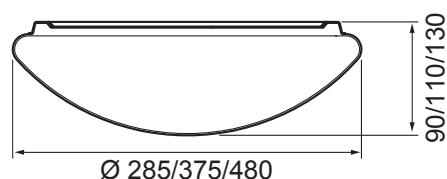

By order • In stock

### Bruno

NO.	CODE	W	LM
4289689	D2BRAA 285 IP44 14W/830 ACO WH	14	1400
4289690	D2BRAB 285 IP44 14W/840 ACO WH	14	1400
4289691	D2BRAG 375 IP44 27W/830 ACO WH	27	2700
4289692	D2BRAH 375 IP44 27W/840 ACO WH	27	2700
4289696	D2BRAM 480 IP44 34W/830 ACO WH	34	3600
4289697	D2BRAN 480 IP44 34W/840 ACO WH	34	3600

### Bruno Dali

NO.	CODE	W	LM
4289767	D2BRBG 375 IP44 27W/830 DA2 ACO WH	27	2700
4289768	D2BRBH 375 IP44 27W/840 DA2 ACO WH	27	2700
4289771	D2BRBK 480 IP44 34W/830 DA2 ACO WH	34	3600
4289772	D2BRBL 480 IP44 34W/840 DA2 ACO WH	34	3600

### Bruno sensor luminaires

NO.	CODE	W	LM
4146682	D1BRCB 285 IP44 14W/840 RA/MS ACO WH	14	1400