





## Carol

A downlight range designed for corridors and lobbies in public buildings. An extensive, high-quality selection that offers a choice of three different sizes. Integrated LED, colour temperatures of 3000 K and 4000 K. Available as on/off and Dali models. Glossy reflector. Recessed mounting on a ceiling.

- Steel housing and reflector. Opal glass diffuser.
  - White.
  - Protection class II.
  - Recessed mounting, linkable 5 x 2,5 mm<sup>2</sup>.
  - Installation height 2–4 m.
  - On/off and Dali-versions with push-button control.
  - Integrated LED: 10W 1000 lm; 20 W 2100 lm; 28 W 3000 lm.
  - Colour temperatures 3000 K and 4000 K.  
CRI > 80 / Ra > 80.
  - MacAdam 3 SDCM.
  - IP20/IP43.
  - Ambient temperature range 0 ... 25 °C.
  - Rated lifetime L80 80 000 h (Ta25°C).
  - Power source service life 50 000 h.
  - Power source service life L70 100 000 h (Ta25°C).
  - Power source service life L80 60 000 h (Ta25°C).
  - WH = white, DA = Dali.
- Also available in 2700 K and 5000 K color temperatures, 240 mm 15W/1500 lm models and Casambi and 1-10V versions on a project-specific basis.

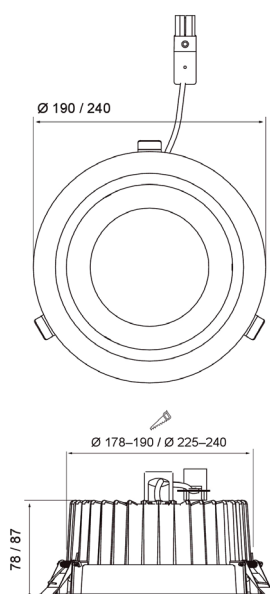

By order

### Carol 190

NO.	CODE	W	LM
4146571	A1CAAF 190 IP43 10W/840 GLO WH	10	1000
4146572	A1CAAG 190 IP43 10W/830 GLO WH	10	1000
4146573	A1CAAH 190 IP43 10W/840 DA GLO WH	10	1000
4146574	A1CAAI 190 IP43 10W/830 DA GLO WH	10	1000

### Carol 240

NO.	CODE	W	LM
4146575	A1CAAJ 240 IP43 20W/840 GLO WH	20	2100
4146576	A1CAAK 240 IP43 20W/830 GLO WH	20	2100
4146577	A1CAAL 240 IP43 28W/840 GLO WH	28	3000
4146578	A1CAAM 240 IP43 28W/830 GLO WH	28	3000
4146579	A1CAAN 240 IP43 20W/840 DA GLO WH	20	2100
4146580	A1CAAO 240 IP43 20W/830 DA GLO WH	20	2100
4146581	A1CAAP 240 IP43 28W/840 DA GLO WH	28	3000
4146582	A1CAAQ 240 IP43 28W/830 DA GLO WH	28	3000