



Clean

For hospitals and other premises where the luminaire must meet the clean space requirements (IP65). Available in two sizes, outputs and colour temperatures. The luminaire offers a high light output/W. Clean luminaires have been certified in accordance with the ISO 14644-1 standard and they have been granted the ISO 3 cleanroom classification.

- Steel housing and opal acrylic diffuser.
- White RAL 9003.
- Protection class I.
- Recessed mounting on a T-grid ceiling.
- Linkable, 3/5 x 2.5 mm²
- Installation height 2–4 m.
- Fixed LED: 39–54 W / 4038–5568 lm.
- Colour temperatures: 3000 K and 4000 K
CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP65.
- The standard range includes on/off and Dali-2 models.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L80 100 000 h (Ta25°C).
- Power source lifespan: 100 000 h. Tc < 65 °C.
- WH = white, DA2 = Dali-2.

- 1–10V solutions and push-button controlled versions are available on a project-specific basis. Also available in sizes 300 x 600 mm, 300 x 1500 mm and 600 x 1200 mm. CRI > 90 available by special order. The colour temperature options available are: 2700 K, 5700 K and 6500 K as well as Tunable White. The luminaire is also available for order in grey RAL 9006. Available with various diffuser combinations: laminated safety glass, micro-prismatic (UGR < 19) and laser glass. Models also available for various mounting options, such as surface mounting, mounting on plasterboard and with concealed grid brackets.

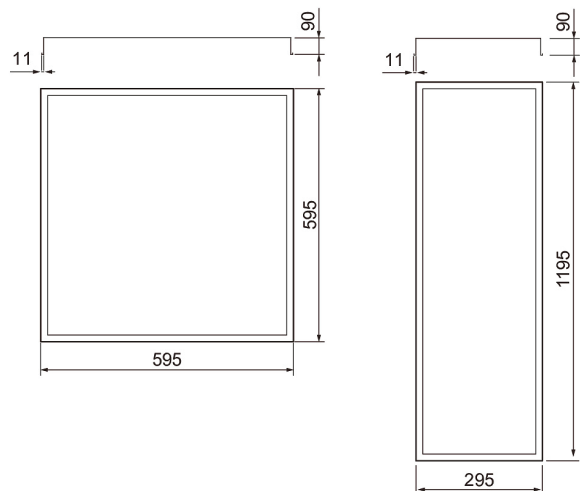

By order

Clean 600 x 600

NO.	CODE	W	LM
4207220	E2CLAA 600x600 IP65 39W/830 ACO	39	4900
4207222	E2CLAB 600x600 IP65 39W/840 ACO	39	4900
4207225	E2CLAE 600x600 IP65 54W/830 ACO	54	6600
4207227	E2CLAF 600x600 IP65 54W/840 ACO	54	6600

Clean 1200 x 300

NO.	CODE	W	LM
4207292	E2CLCA 1200x300 IP65 39W/830 ACO	39	4900
4207294	E2CLCB 1200x300 IP65 39W/840 ACO	39	4900
4207302	E2CLCE 1200x300 IP65 54W/830 ACO	54	6600
4207303	E2CLCF 1200x300 IP65 54W/840 ACO	54	6600

Clean Dali 600 x 600

NO.	CODE	W	LM
4207223	E2CLAC 600x600 IP65 39W/830 DA2 ACO	39	4900
4207224	E2CLAD 600x600 IP65 39W/840 DA2 ACO	39	4900
4207228	E2CLAG 600x600 IP65 54W/830 DA2 ACO	54	6600
4207229	E2CLAH 600x600 IP65 54W/840 DA2 ACO	54	6600

Clean Dali 1200 x 300

NO.	CODE	W	LM
4207300	E2CLCC 1200x300 IP65 39W/830 DA2 ACO	39	4900
4207301	E2CLCD 1200x300 IP65 39W/840 DA2 ACO	39	4900
4207304	E2CLCG 1200x300 IP65 54W/830 DA2 ACO	54	6600
4207305	E2CLCH 1200x300 IP65 54W/840 DA2 ACO	54	6600