
IP20
IP54

3 x 1,5


Compact Multi




Compact Multi is a high-quality downlight with a housing made from recycled aluminium and a frame and protective cover made from recycled plastic. The light source in Compact Multi is user-replaceable, extending the service life of the luminaire. The adjustable luminaire is suitable for creating general lighting and highlighting details. Typical applications include residential buildings and public spaces where high-quality colour rendering is required, such as museums, restaurants, galleries and hotels. The luminaire's colour temperature is selected from three options prior to installation. Dimmability provides additional flexibility for lighting different spaces.

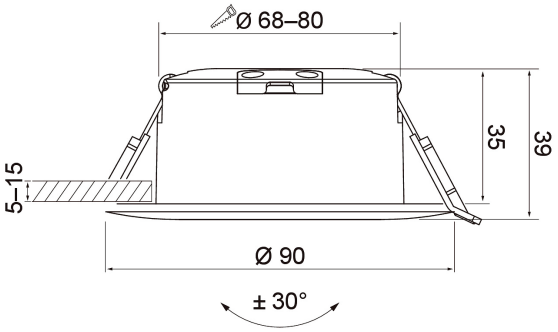

- Body recycled aluminium, frame and protective cup recycled plastic.
- White RAL 9010, black RAL 9005.
- Protection class II.
- Recessed mounting on a ceiling.
- Linkable, max 3 x 1,5 mm^2.
- Installation height 2–6 m.
- Integraded LED 7 W / 500 lm.
- Beam angle 36°.
- Colour temperatures 2700 K, 3300 K and 4000 K, selectable from the luminaire. CRI > 90 / Ra > 90.
- MacAdam 3 SDCM.
- IP20/IP54.
- IK02.
- Dimming: rising- and trailing-edge control.
- Ambient temperature range 0 ... 25 °C.
- Rated life time L70 100 000 h (Ta25°C).
- Rated life time L80 65 000 h (Ta25°C).





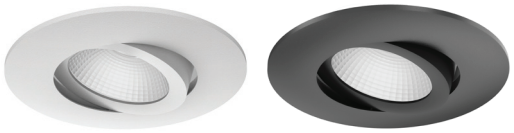

• In stock

Compact Multi Dim

	NO.	CODE		W	LM
•	4146965	A1COE1	IP54 7W 927/933/940 DIM WH	7	500
•	4146966	A1COE2	IP54 7W 927/933/940 DIM BK	7	500

Compact Multi Dim 6-pack

	NO.	CODE		W	LM
•	4146967	A1COE3	IP54 7W 927/933/940 DIM WH 6-pack	7	500
•	4146968	A1COE4	IP54 7W 927/933/940 DIM BK 6-pack	7	500

