





Direct M

Direct M is an energy-efficient and adjustable spotlight with a long lifespan. Its compact size, high-quality light, and excellent color rendering make it an excellent choice for public spaces. Applications include stores, shops, hotels and restaurants. Direct is installed on a track, making its installation easy and flexible. The luminaire has an almost invisible driver integrated directly into the track adapter. The Direct M model is particularly well-suited for store lighting. Its light output and adjustability offer numerous options for illuminating store spaces; the luminaire is easy to move and redirect as needed. Adjusting the direction of the light provides options for illuminating different spaces; the luminaire is easy to move and direct as needed.

- Aluminium housing. Reflector 36°.
- White, RAL 9010 and black, RAL 9005.
- Protection class II.
- Mounting on a three-phase contact rail. Dali-2 models on a Dali contact rail.
- Compatible three-phase contact rails: Global Trac Pro, Unipro and Stucchi OneTrack.
- Compatible Dali contact rails: Nordic Aluminium Global Pulse and Stucchi OneTrack.
- Installation height 3–6 m.
- Colour temperatures 3000 K and 4000 K. CRI > 90 / Ra > 90.
- IP20.
- Integrated LED 20 W: 2500/2550 lm, 26 W: 3350/3450 lm.
- MacAdam 3 SDCM.
- Ambient temperature range 0 ... 25 °C.
- Accessories: reflectors 20D and 65D, honeycomb anti-glare screen and two decorative rings, colour options gold and silver.
- Rated lifetime L70B50 100 000 h (Ta25°C).
- Rated lifetime L80B50 100 000 h (Ta25°C).

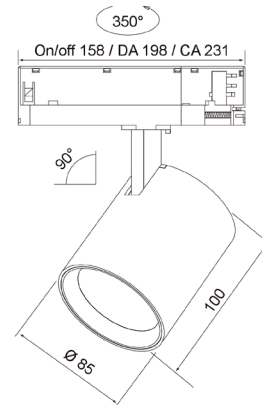

By order, • In stock

Direct M


NO.	CODE		W	LM
• 4146985	A1DIRI	IP20 2550lm 940 36D WH	20	2550
• 4146986	A1DIRE	IP20 2500lm 930 36D WH	20	2500
• 4146987	A1DIRJ	IP20 2550lm 940 36D BK	20	2550
• 4146988	A1DIRF	IP20 2500lm 930 36D BK	20	2500
	A1DIRK	IP20 3450lm 940 36D WH	26	3450
	A1DIRL	IP20 3350lm 930 36D WH	26	3350
	A1DIRM	IP20 3450lm 940 36D BK	26	3450
	A1DIRN	IP20 3350lm 930 36D BK	26	3350

Direct M Dali

NO.	CODE		W	LM
• 4146989	A1DIRI-DALI	IP20 2550lm 940 36D DA2 WH	20	2550
• 4146990	A1DIRE-DALI	IP20 2500lm 930 36D DA2 WH	20	2500
• 4146991	A1DIRJ-DALI	IP20 2550lm 940 36D DA2 BK	20	2550
• 4146992	A1DIRF-DALI	IP20 2500lm 930 36D DA2 BK	20	2500
	A1DIRK-DALI	IP20 3450lm 940 36D DA2 WH	26	3450
	A1DIRL-DALI	IP20 3350lm 930 36D DA2 WH	26	3350
	A1DIRM-DALI	IP20 3450lm 940 36D DA2 BK	26	3450
	A1DIRN-DALI	IP20 3350lm 930 36D DA2 BK	26	3350

Direct M Casambi

NO.	CODE		W	LM
	A1DIRI-CA	IP20 2550lm 940 36D CA WH	20	2550
	A1DIRE-CA	IP20 2500lm 930 36D CA WH	20	2500
	A1DIRJ-CA	IP20 2550lm 940 36D CA BK	20	2550
	A1DIRF-CA	IP20 2500lm 930 36D CA BK	20	2500
	A1DIRK-CA	IP20 3450lm 940 36D CA WH	26	3450
	A1DIRL-CA	IP20 3350lm 930 36D CA WH	26	3350
	A1DIRM-CA	IP20 3450lm 940 36D CA BK	26	3450
	A1DIRN-CA	IP20 3350lm 930 36D CA BK	26	3350

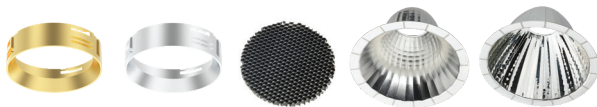

Direct M Accessories

NO.	CODE	
•	A1DIBE	Decorative ring M GD
•	A1DIBF	Decorative ring M SI
•	A1DIBD	Honeycomb M
•	A1DIBH	Reflector NB M 20°
•	A1DIBI	Reflector WB M 65°