





Direct S

Direct S is an energy-efficient and adjustable spotlight with a long lifespan. Its compact size, high-quality light, and excellent color rendering make it an excellent choice for public spaces. Applications include stores, shops, hotels and restaurants. Direct is installed on a track, making its installation easy and flexible. The luminaire has an almost invisible driver integrated directly into the track adapter. Adjusting the direction of the light beam provides options for illuminating different spaces; the luminaire is easy to move and redirect as needed.

- Aluminium housing. Reflector 36°.
- White, RAL 9010 and black, RAL 9005.
- Protection class II.
- Mounting on a Dali contact rail.
- Compatible Dali contact rails: Nordic Aluminium Global Pulse and Stucchi OneTrack.
- Installation height 3–6 m.
- Colour temperatures 3000 K and 4000 K. CRI > 90 / Ra > 90.
- IP20.
- Integrated LED 15 W: 1700/1750 lm.
- MacAdam 3 SDCM.
- Accessories: reflector 20D, honeycomb anti-glare screen and two decorative rings, colour options gold and silver.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70B50 100 000 (Ta25°C).
- Rated lifetime L80B50 100 000 (Ta25°C).

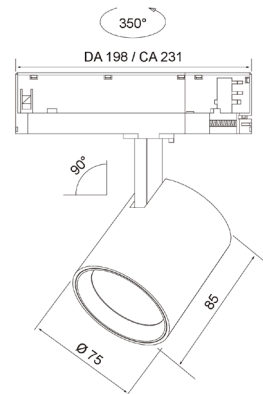

By order, • In stock

Direct S Dali

NO.	CODE	W	LM
• 4146981	A1DIRA-DALI IP20 1750lm 940 36D DA2 WH	15	1750
• 4146982	A1DIRB-DALI IP20 1700lm 930 36D DA2 WH	15	1700
• 4146983	A1DIRC-DALI IP20 1750lm 940 36D DA2 BK	15	1750
• 4146984	A1DIRD-DALI IP20 1700lm 930 36D DA2 BK	15	1700

Direct S Casambi

NO.	CODE	W	LM
	A1DIRA-CA IP20 1750lm 940 36D CA WH	15	1750
	A1DIRB-CA IP20 1700lm 930 36D CA WH	15	1700
	A1DIRC-CA IP20 1750lm 940 36D CA BK	15	1750
	A1DIRD-CA IP20 1700lm 930 36D CA BK	15	1700

Direct S Accessories

NO.	CODE	
•	A1DIBB	Decorative ring S GD
•	A1DIBC	Decorative ring S SI
•	A1DIBA	Honeycomb S
•	A1DIBG	Reflector NB S 20°

