






DM4

The modern and clean-lined DM4 is suitable for indoor and outdoor use in single-family homes, for example. It comes with an integrated LED. High-quality surface treatment, stainless steel screws. Read more about the matching DM4 Stelo bollard luminaires.

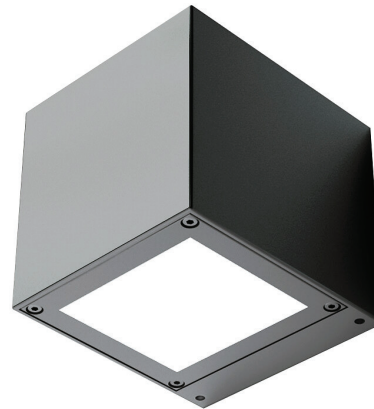

- Aluminium housing and transparent glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm².
- Installation height 0.5–4 m.
- Integrated LED 8–16 W, 805–1,680 lm.
- Colour temperatures 3,000 K and 4,000. CRI >80 / Ra > 80.
- IP65.
- IK05.
- On/off.
- Ambient temperature range -25 ... 35 °C
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.

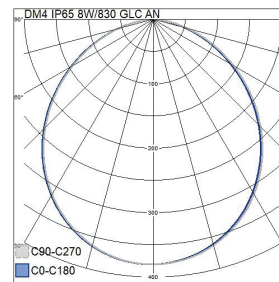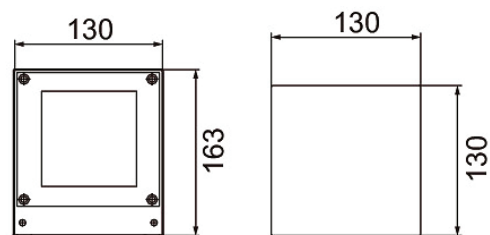

By order

DM4 anthracite

NO.	CODE	W	LM
4511688	B5DMFD IP65 8W/830 GLC AN	8	805
4511696	B5DMHD IP65 8W/840 GLC AN	8	840

DM4 black

NO.	CODE	W	LM
4511690	B5DMFB IP65 8W/830 GLC BK	8	805
4511698	B5DMHB IP65 8W/840 GLC BK	8	840

DM4 white

NO.	CODE	W	LM
4511691	B5DMFA IP65 8W/830 GLC WH	8	805
4511699	B5DMHA IP65 8W/840 GLC WH	8	840

DM4 silver

NO.	CODE	W	LM
4511689	B5DMFC IP65 8W/830 GLC SI	8	805
4511697	B5DMHC IP65 8W/840 GLC SI	8	840