





Flat R Duo

The Flat R Duo downlight with changeable colour temperature can be mounted in a low ceiling structure. Made of high-quality materials and with a good looking finish, this luminaire is versatile as a general luminaire for the home. While IP44 rated, this luminaire is also particularly suitable for bathrooms and other wet spaces. The luminaire has a matt body in structured aluminum and a diffuser in opal acrylic. All models are dimmable. The luminaire can also be linked.

- Aluminium body and opal acrylic diffuser.
- White, RAL 9003.
- Protection class II.
- Recessed mounting on a ceiling.
- Linkable: Dimmable and Casambi models max 3 x 2,5 mm². Dali-2 models maks. 5 x 2,5 mm².
- Colour temperature: 3000/4000 K, adjustable on the luminaire. CRI > 80 / Ra > 80.
- MacAdam 6 SDCM.
- IP20/IP44.
- IK03.
- Fixed LED 8 W / 500 lm, 12 W / 1000 lm, 18 W / 1500 lm.
- Dimming: rising- and trailing-edge control, Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 80 000 h (Ta25°C).
- Rated lifetime L80 50 000 h (Ta25°C).
- Power source lifetime 50 000 h.

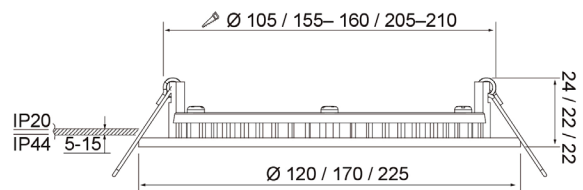

By order • In stock

Flat R Duo Dim

NO.	CODE		W	LM
• 4146518	A2FDUA	120 IP44 8W 830/840 DIM WH	8	500
• 4146519	A2FDUB	170 IP44 12W 830/840 DIM WH	12	1000
• 4146520	A2FDUC	225 IP44 18W 830/840 DIM WH	18	1500

Flat R Duo Dali

NO.	CODE		W	LM
	A2FDUA-DALI	120 IP44 8W 830/840 DA2 WH	8	500
	A2FDUB-DALI	170 IP44 12W 830/840 DA2 WH	12	1000
	A2FDUC-DALI	225 IP44 18W 830/840 DA2 WH	18	1500

Flat R Duo Casambi

NO.	CODE		W	LM
	A2FDUA-CA	120 IP44 8W 830/840 CA WH	8	500
	A2FDUB-CA	170 IP44 12W 830/840 CA WH	12	1000
	A2FDUC-CA	225 IP44 18W 830/840 CA WH	18	1500