


## Flat Sq

Luminaires in the Flat Sq downlight range are suitable for mounting on a low ceiling structure. They are designed for use in bathrooms, corridors and lobbies. The luminaire is dimmable. Equipped with spring terminal blocks, these luminaire can also be linked.

- Aluminium body and polycarbonate diffuser.
- White, RAL 9003.
- Protection class II.
- Recessed mounting on a ceiling.
- Linkable: Dimmable and Casambi models max 3 x 2,5 mm<sup>2</sup>. Dali-2 models maks. 5 x 2,5 mm<sup>2</sup>.
- Colour temperatures 3000 K and 4000 K. CRI > 80 / Ra > 80.
- MacAdam 4 SDCM.
- IP20/IP44.
- Fixed LED 9 W / 500 lm, 12 W / 900 lm, 15 W / 1300 lm.
- Dimming: trailing-edge control, Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 50 000 h (Ta25°C).
- Power source lifetime 50 000 h.

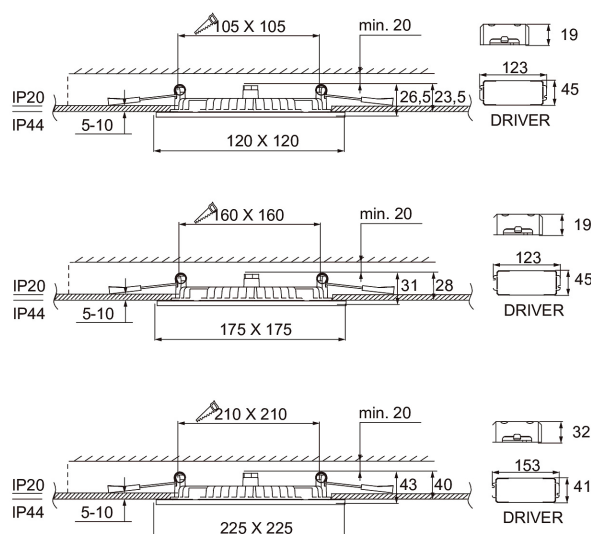

By order • In stock

### Flat Sq Dim

NO.	CODE	W	LM
4297885	A2FLGG	120 IP44 9W/830 DIM PCO WH	9 500
4297886	A2FLGH	120 IP44 9W/840 DIM PCO WH	9 500
4297887	A2FLGI	175 IP44 12W/830 DIM PCO WH	12 900
4297888	A2FLGJ	175 IP44 12W/840 DIM PCO WH	12 900
4297889	A2FLGK	225 IP44 15W/830 DIM PCO WH	15 1300
4297890	A2FLGL	225 IP44 15W/840 DIM PCO WH	15 1300

### Flat Sq Dali

NO.	CODE	W	LM
	A2FLGG-DALI	120 IP44 9W/830 DA2 PCO WH	9 500
	A2FLGH-DALI	120 IP44 9W/840 DA2 PCO WH	9 500
	A2FLGI-DALI	175 IP44 12W/830 DA2 PCO WH	12 900
	A2FLGJ-DALI	175 IP44 12W/840 DA2 PCO WH	12 900
	A2FLGK-DALI	225 IP44 15W/830 DA2 PCO WH	15 1300
	A2FLGL-DALI	225 IP44 15W/840 DA2 PCO WH	15 1300

### Flat Sq Casambi

NO.	CODE	W	LM
	A2FLGG-CA	120 IP44 9W/830 CA PCO WH	9 500
	A2FLGH-CA	120 IP44 9W/840 CA PCO WH	9 500
	A2FLGI-CA	175 IP44 12W/830 CA PCO WH	12 900
	A2FLGJ-CA	175 IP44 12W/840 CA PCO WH	12 900
	A2FLGK-CA	225 IP44 15W/830 CA PCO WH	15 1300
	A2FLGL-CA	225 IP44 15W/840 CA PCO WH	15 1300

