



Futura Ex



Suitable for spaces with an explosive atmosphere or high levels of dust, such as chemical industry production facilities. The structure of the luminaires meets the requirements set in the ATEX directive 2014/34/EU (Ex II 3G Ex nA IIC T6 Gc, Ex II 3D Ex Tc IIIC T85°C Dc). Extremely robust design.

- Polycarbonate housing and opal diffuser (PC). Stainless steel latches.
- Grey.
- Protection class I.
- Suitable for Ex-zone classes 2 and 22.
- Surface mounting.
- Throughwired 5 x 2.5 mm².
- Installation height 2–8 m.
- Integrated LED:

1200 mm: 27 W / 3930 lm. 53 W / 7810 lm.

1500 mm: 33 W / 4860 lm. 65 W / 9800 lm.

- Colour temperature 4000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP66.
- IK10.
- On/off.
- Ambient temperature range -20 ... 55 °C.
- Rated lifetime L70 100 000 h (Ta55°C).
- Power source service life 100 000 h.

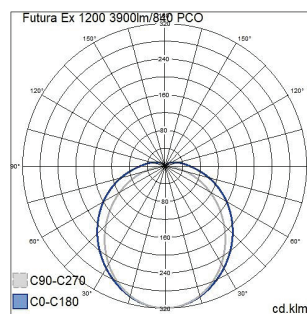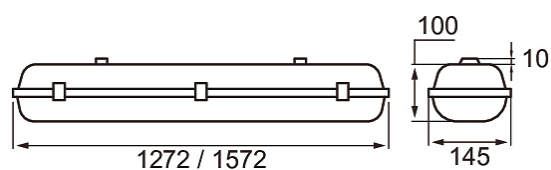

• In stock

Futura Ex 1275

NO.	CODE		W	LM
• 4338540	T3FXBA	1200 IP66 IK10 3900lm/840 PCO Ex	27	3930
• 4338541	T3FXBB	1200 IP66 IK10 7800lm/840 PCO Ex	53	7810

Futura Ex 1572

NO.	CODE		W	LM
• 4338542	T3FXBC	1500 IP66 IK10 4900lm/840 PCO Ex	33	4860
• 4338543	T3FXBD	1500 IP66 IK10 9800lm/840 PCO Ex	65	9800