





Futura RST

Futura RST is a reliable industrial luminaire for challenging applications where extra durability is required from the lighting solution. Its applications include warehouses, industrial facilities, shelters, agricultural production premises and other spaces without explosion hazards. The luminaire is made of impact- and chemical-resistant materials. It is equipped with a stainless steel housing and heat-treated hardened glass diffuser.

- Stainless steel housing and hardened glass diffuser
- Steel, white reflector RAL 9003.
- Protection class I.
- Surface mounting on a wall or ceiling, suspension mounting possible with a wire available by special order.
- Throughwired 5 × 2.5 mm².
- Installation height 2–6 m.
- Integrated LED:
 - 1300 mm 27 W 3500 lm / 38 W 5000 lm.
 - 1600 mm 33 W 4300 lm / 45 W 6200 lm.
- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP65.
- IK10.
- The standard range includes on/off and Dali-2 models with the CLO function.
- Ambient temperature range -25 ... 35 °C
- Rated lifetime L70 100 000 h (Ta25°C).
- Rated lifetime L80 80 000 h (Ta25°C).
- Rated lifetime L90 50 000 h (Ta25°C).
- Also available 680 mm models 1100–1800 lm, 1290 mm models 2000–5100 lm and 1600 mm models 2500–6400 lm. The 1,290 mm and 1,600 mm models are also available as a safety lighting version with 1 h or 3 h batteries. The Dali versions are available as 1- and 3-phase through-wired versions. Color temperatures by order: (CRI > 80:) 3000 K, 5000 K and 6500 K, (CRI > 90:) 3000 K and 4000 K. Also available with a protective film on the diffuser.

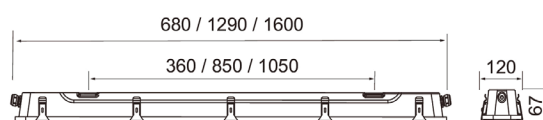

By order

Futura RST

NO.	CODE	W	LM
	A3FRSE 1290 IP65 3500lm/840 GLFR	27	3500
	A3FRSG 1290 IP65 5000lm/840 GLFR	38	5000
4338517	A3FRSC 1600 IP65 4300lm/840 GLFR	33	4300
4338515	A3FRSA 1600 IP65 6200lm/840 GLFR	45	6200

Futura RST Dali

NO.	CODE	W	LM
	A3FRSF 1290 IP65 3500lm/840 DA2 GLFR	27	3500
	A3FRSH 1290 IP65 5000lm/840 DA2 GLFR	38	5000
4338518	A3FRSD 1600 IP65 4300lm/840 DA2 GLFR	33	4300
4338516	A3FRSB 1600 IP65 6200lm/840 DA2 GLFR	45	6200