





## Greta Big

An aluminium bollard luminaire for outdoor use. The solid Greta Big is an ideal choice for locations such as shop fronts. The bollard luminaires, which are equipped with an efficient integrated LED, distribute light in four directions. Available in two colour temperatures. High-quality surface treatment, stainless steel screws.

- Aluminium housing and frosted polycarbonate diffuser (PCFR).
- Anthracite, silver, black and white.
- Protection class I.
- Not linkable, 3 x 2.5 mm<sup>2</sup>.
- Installation: 1. Bolt fastening directly to a concrete slab.  
2. Using ground support MTS-2N (4146704) together with ground support P (4107104) or 3. Ground support MTS-2N (4146704) with a 60 mm concrete base on soft ground.
- Integrated LED 25 W / 1000 lm.
- Colour temperatures 3,000 K and 4,000 K.  
CRI > 80 / Ra > 80.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 35 °C
- Rated lifetime L70 100,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white,  
FR = frosted diffuser.

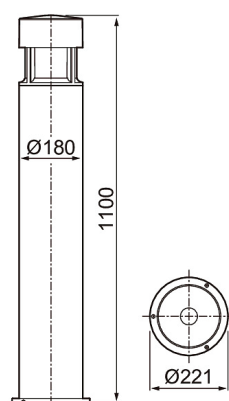

By order

### Greta Big 830

NO.	CODE	W	LM
4512230	B5GRED IP65 25W/830 PCFR AN H1100	25	1000
4512231	B5GREC IP65 25W/830 PCFR SI H1100	25	1000
4512232	B5GREB IP65 25W/830 PCFR BK H1100	25	1000
4512233	B5GREA IP65 25W/830 PCFR WH H1100	25	1000

### Greta Big 840

NO.	CODE	W	LM
4512235	B5GREJ IP65 25W/840 PCFR AN H1100	25	1000
4512236	B5GREH IP65 25W/840 PCFR SI H1100	25	1000
4512237	B5GREG IP65 25W/840 PCFR BK H1100	25	1000
4512238	B5GREF IP65 25W/840 PCFR WH H1100	25	1000