




Kappa V

Kappa V is a wall luminaire suitable for indoor and outdoor use. With its rounded corners, this elegant luminaire blends in with the décor in both new and renovated buildings. Kappa V -model has an anti-glare shield. It comes with an integrated LED and two colour temperatures. A light source with an E27 base can be ordered separately. High-quality surface treatment.

- Aluminium housing and frosted glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable, 3 x 2.5 mm².
- Installation height 0.5–4 m.
- Integrated LED 9W / 830 500 lm, 840 520 lm.
- Led lamp max. 11 W A60 E27, not included.
- Lamp recommendations: Airam Frost led -range.
- Colour temperatures of the integrated LEDs 3,000 K and 4,000. CRI >80 / Ra > 80.
- IP55.
- IK03.
- On/off.
- Ambient temperature range -25 ... 25 °C
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.

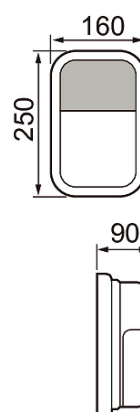

By order

Kappa V 830

NO.	CODE	W	LM
4507460	B5KACD IP55 IK03 9W/830 GLFR ANT V	9	510
4507459	B5KACC IP55 IK03 9W/830 GLFR SI V	9	510
4507458	B5KACB IP55 IK03 9W/830 GLFR BK V	9	510
4507457	B5KACA IP55 IK03 9W/830 GLFR WH V	9	510

Kappa V 840

NO.	CODE	W	LM
4509996	B5KACH IP55 IK03 9W/840 GLFR ANT V	9	530
4509995	B5KACG IP55 IK03 9W/840 GLFR SI V	9	530
4509994	B5KACF IP55 IK03 9W/840 GLFR BK V	9	530
4509993	B5KACE IP55 IK03 9W/840 GLFR WH V	9	530

Kappa V E27

NO.	CODE
4507200	B5KACL IP55 IK03 E27 GLFR ANT V
4509999	B5KACK IP55 IK03 E27 GLFR SI V
4509998	B5KACJ IP55 IK03 E27 GLFR BK V
4509997	B5KACI IP55 IK03 E27 GLFR WH V