

Led Housing Basic

IP66



5 x 2,5





IK10

-30 ... 40 °C PF≥0.9












Teollisuusvalaisin suljettu | Kapslad industriarmatur | Sealed industrial luminaire

Lamps intended for use a LED tube G13: EN 62776

LED TUBE		A	D	145	95	100	111
							
		1x600	1x1200	1x1500			
		2x600	2x1200	2x1500			
		A (mm)	662	1272	1572		
		D (mm)	350	700	940		
LED TUBE SLIM		A	D	95	100	111	
							
		2x600	2x1200	2x1500			
		A (mm)	662	1272	1572		
		D (mm)	350	700	940		

LED TYP G13	
LED TUBE	LEDtube 1x600mm
	LEDtube 1x1200mm
	LEDtube 1x1500mm
LED TUBE	LEDtube 2x600mm
	LEDtube 2x1200mm
	LEDtube 2x1500mm
LED TUBE SLIM	LEDtube 2x600mm
	LEDtube 2x1200mm
	LEDtube 2x1500mm









LED tube lifespan depends on used type.

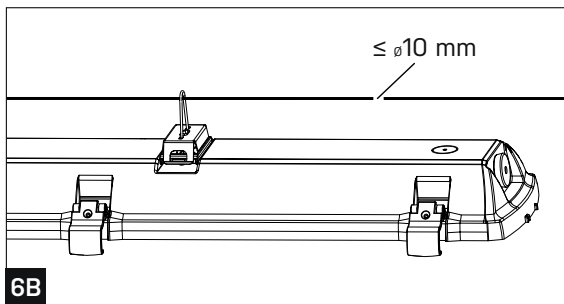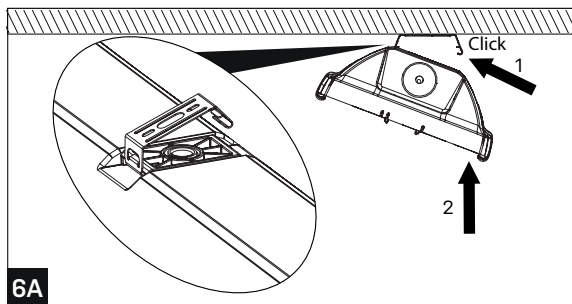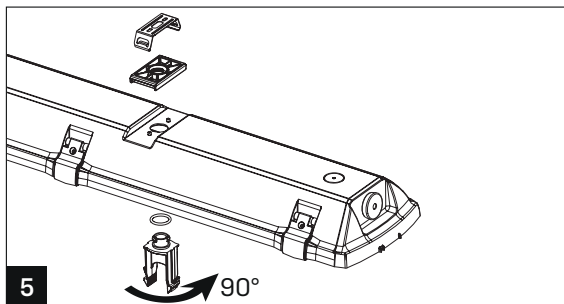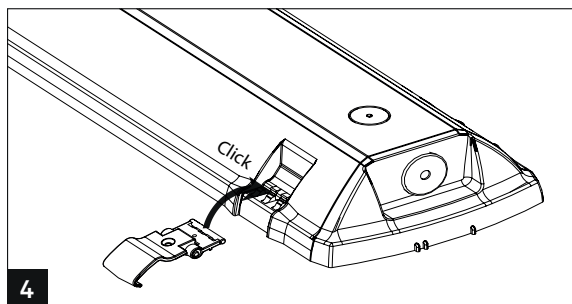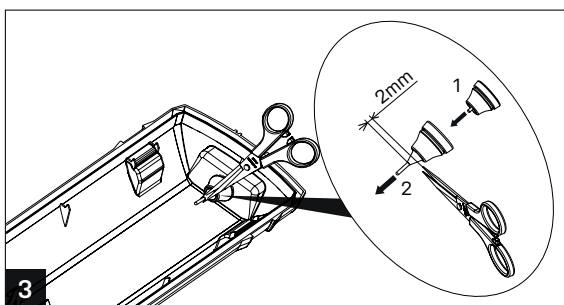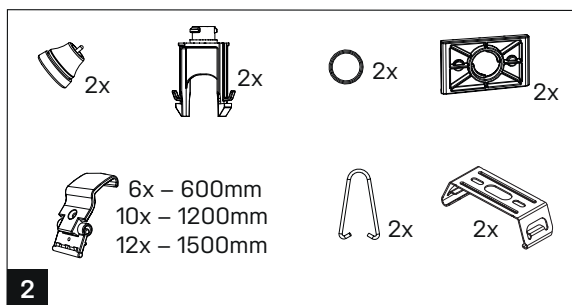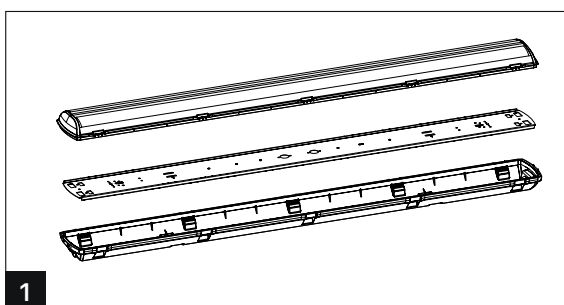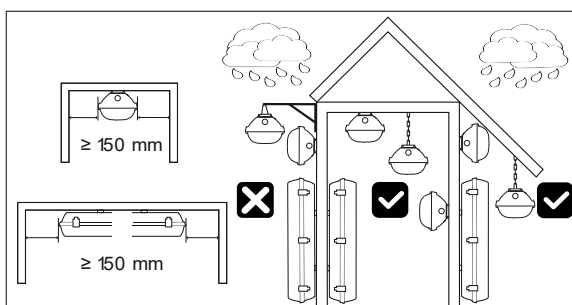

Led Housing Basic

IP66    $5 \times 2,5$  Δ IK10 $-30 \dots 40^\circ\text{C}$ PF $\geq$ 0.9  

Teollisuusvalaisin suljettu | Kapslad industriarmatur | Sealed industrial luminaire

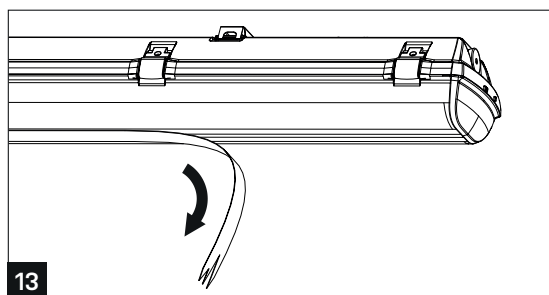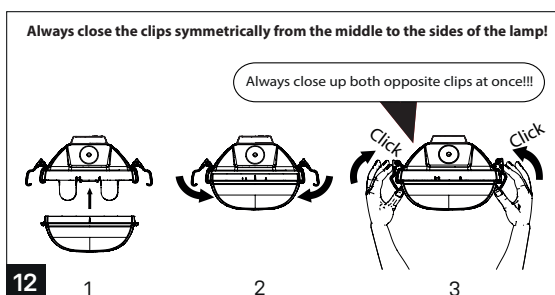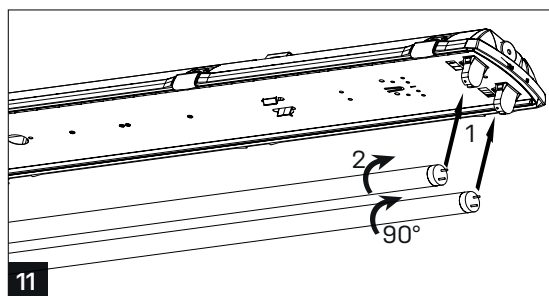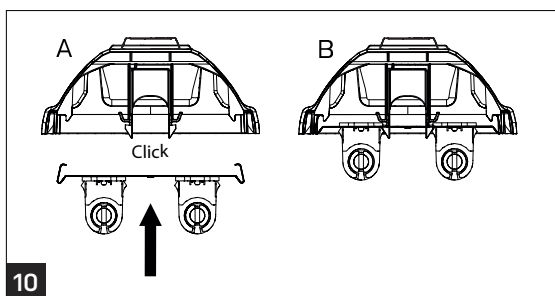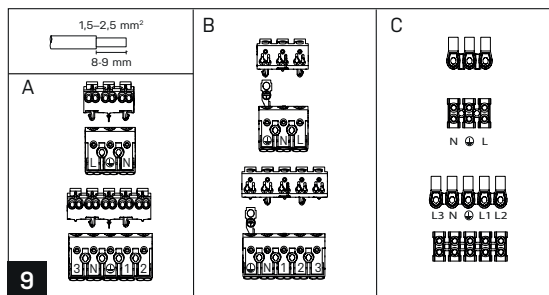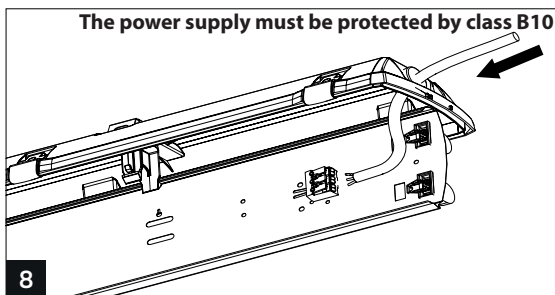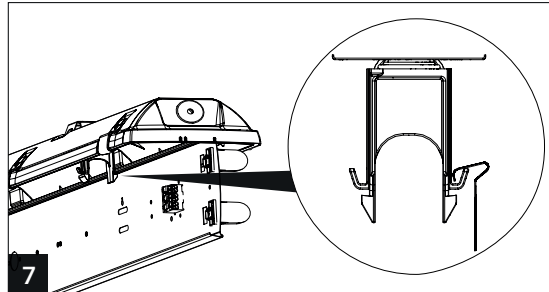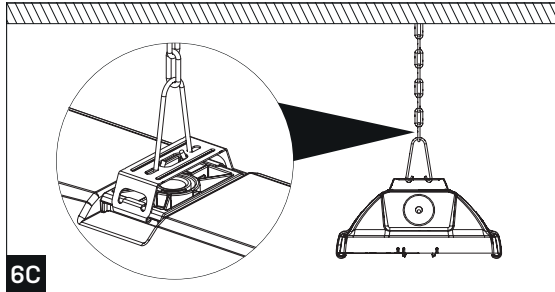

EN Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.