





Line Double

Line Double is a wall luminaire designed for both indoor and outdoor use. The luminaires' integrated LEDs distribute light upwards and downwards. The clean-lined design is suitable for a wide range of applications. High-quality surface treatment: The luminaire housing is coated with polyester paint that is resistant to corrosion and UV radiation, and the screws are made of stainless steel.



- Aluminium housing and frosted glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable 3 × 2.5 mm².
- Installation height 0.5–4 m.
- Integrated LED 3000 K 23W 1200 lm, 4000 K 23W 1300 lm. CRI > 80 / Ra > 80.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 35 °C.
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.

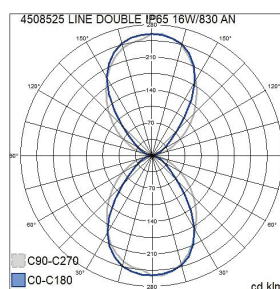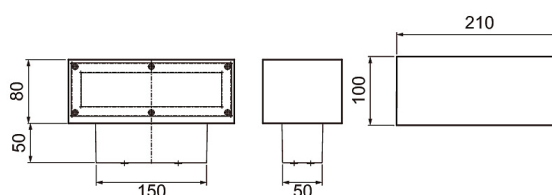

By order

Line Double 830

NO.	CODE	W	LM
4508525	B5LIDFL IP65 IK07 23W/830 GLFR AN	23	1200
4508524	B5LIDK IP65 IK07 23W/830 GLFR SI	23	1200
4508523	B5LIDJ IP65 IK07 23W/830 GLFR BK	23	1200
4508522	B5LIDI IP65 IK07 23W/830 GLFR WH	23	1200

Line Double 840

NO.	CODE	W	LM
4508406	B5LNDD IP65 IK07 23W/840 GLFR AN	23	1300
4508405	B5LNDC IP65 IK07 23W/840 GLFR SI	23	1300
4508404	B5LNDB IP65 IK07 23W/840 GLFR BK	23	1300
4508403	B5LNDA IP65 IK07 23W/840 GLFR WH	23	1300