



Lumino

Lumino is a low-profile, high-quality and long-lasting universal luminaire for residential buildings and public places. The appearance of the luminaire is finished and the light it gives is uniform and high-quality. Thanks to its low structure, the luminaire fits elegantly and discreetly into various spaces and interiors. The luminaire is suitable for indoor and outdoor wall and ceiling installations in stairwells and public spaces. You can also install Lumino outdoors, as it can withstand cold temperatures. Thanks to the IP44 class, you can install the luminaire in the bathroom and other damp areas. The luminaire can also be installed with a surface cable using the raising frame which is available as an accessory. The luminaire has two color temperatures. You can choose from two size options and PIR- and sensor versions from both sizes. For the 400 model, control options are also available as Dali-2 and Casambi. Lumino is designed in Kerava, Finland for Nordic conditions.

- UV-stabilised polycarbonate housing and diffuser.
- White, RAL 9003.
- Protection class II.
- Surface mounting on a wall or ceiling.
- Linking: on/off and Casambi 3 x 1,5/2,5 mm². PIR and Radar 4 x 1,5/2,5 mm². Dali-2 5 x 1,5/2,5 mm².
- Installation height 1,5–6 m.
- Comes in two sizes: Ø 300 and 400 mm.
- Colour temperature 3,000/4,000 K, adjustable on the luminaire. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP44.
- IK10. PIR IK05.
- Integrated LED:
- 300 model: 12 W 1100 lm / 15 W 1500 lm.
- 400 model: 17 W 1800 lm / 25 W 2500 lm.
- 400 Dali-2 and Casambi -models: 22 W 2150 lm.
- Each size is available as on/off and Radar models. 400 model available with Dali-2 (with pushbutton control 230V) and Casambi.
- Radar model work on the microwave sensor principle (5.8GHz) and PIR model detects infrared radiation. Both are suitable for master/slave (M/S) installation, enabling the use of up to 10 slave luminaires.
- The ambient temperature range on/off -30 ... 25 °C, PIR, Radar, Dali-2 and Casambi -20 ... 25 °C.
- Rated lifetime L70B50 100 000 h (Ta25°C).
- Rated lifetime L80B10 80 000 h (Ta25°C).
- Rated lifetime L90B10 50 000 h (Ta25°C).

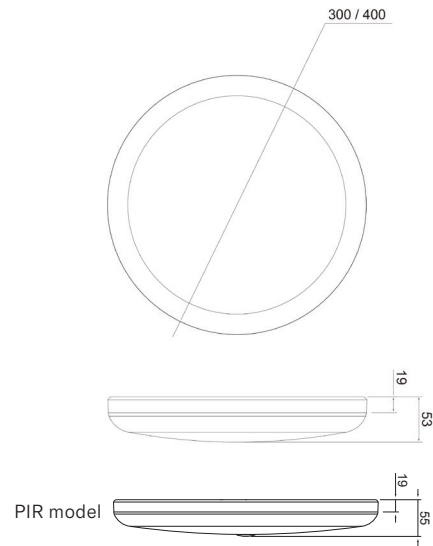

Luminaire fits elegantly and discreetly into various spaces and interiors, thanks to its low structure.



The luminaire can also be installed with a surface cable with the raising frame (4146974). The height of the frame is 34 mm and there are 3 knock-outs.



By order • In stock

Lumino				
NO.	CODE		W	LM
• 4146668	A1LUKA	300 IP44 15W 830/840 PCO WH	15	1500
• 4146670	A1LUKC	400 IP44 25W 830/840 PCO WH	25	2500

Lumino sensor luminaires				
NO.	CODE		W	LM
• 4146669	A1LUKB	300 IP44 15W 830/840 RA PCO WH	15	1500
• 4146671	A1LUKD	400 IP44 25W 830/840 RA PCO WH	25	2500
• 4146971	A1LUKG	300 IP44 15W 830/840 PIR PCO WH	15	1500
• 4146972	A1LUKH	400 IP44 25W 830/840 PIR PCO WH	25	2500

Lumino Dali				
NO.	CODE		W	LM
	A1LUKC-DALI	400 IP44 22W 830/840 PCO DA2	22	2150

Lumino Casambi				
NO.	CODE		W	LM
	A1LUKC-CA	400 IP44 22W 830/840 PCO CA	22	2150