



Office P

The suspension-mounted Office P is an energy-efficient office luminaire range with a downlight. This extensive range offers numerous customisation options. Its optics features include an aluminium parabolic louvre and integrated opal shield, which eliminate glare from the LEDs and achieve a low Unified Glare Rating I/value (UGR <19). The luminaire is delivered with a 2-metre cable. Typical applications include schools, offices and other spaces where computers are used.

- Steel housing, low-luminance louvre made of anodised aluminium.
- White, RAL9003.
- Protection class I.
- Suspension mounting, 2 meters cable (1 mm² MSK), connection via a junction box.
- Integrated LED:
 - 1245 mm 33 W 4000 lm / 46 W 5500 lm.
 - 1545 mm 42 W 5000 lm / 58 W 7000 lm.
- Colour temperatures 3000 K and 4000 K and Tunable white 2700–6500 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off, Dali-2, with pushbutton control 230V and CLO-function, Casambi (Bluetooth mesh) and ActiveAhead (with G2 sensor).
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L80 100 000 h (Ta25°C).
- Rated lifetime L90 80 000 h (Ta25°C).
- Wire suspension kits 4107113 and 4146595 as accessories.
- WH = white, DA2 = Dali-2, CA = Casambi, AA = Helvar ActiveAhead, AL = aluminium, MA = low luminance.
- Also available in colour temperatures 2700 K, 5000 K and 6500 K. CRI > 90 available for order. Project-specific luminous flux packages available on request. High-gloss louvre optics are available for the luminaire by special order. Available color options are also grey (RAL 9007) or black. Available with one pull switch, on/off and Dim.

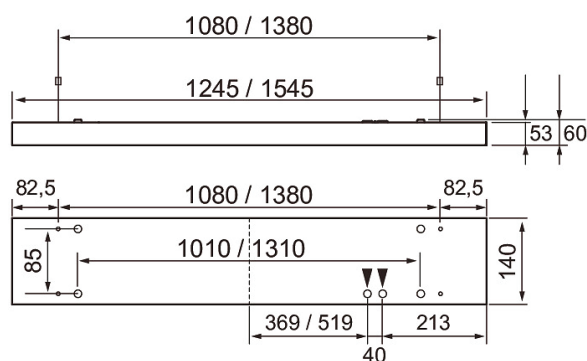

Wire suspension kits 4107113 and 4146595 as accessories.

By order

Office P

NO.	CODE		W	LM
	A1OFBA	1245 33W/830 AL MA WH P	33	4000
4146863	A1OFBB	1245 33W/840 AL MA WH P	33	4000
	A1OFBC	1245 46W/830 AL MA WH P	46	5500
4146864	A1OFBD	1245 46W/840 AL MA WH P	46	5500
	A1OFBE	1545 42W/830 AL MA WH P	42	5000
4146865	A1OFBF	1545 42W/840 AL MA WH P	42	5000
	A1OFBG	1545 58W/830 AL MA WH P	58	7000
4146866	A1OFBH	1545 58W/840 AL MA WH P	58	7000

Office P Dali

NO.	CODE		W	LM
	A1OFBA-DALI	1245 33W/830 DA2 AL MA WH P	33	4000
4146867	A1OFBB-DALI	1245 33W/840 DA2 AL MA WH P	33	4000
	A1OFBC-DALI	1245 46W/830 DA2 AL MA WH P	46	5500
4146868	A1OFBD-DALI	1245 46W/840 DA2 AL MA WH P	46	5500
	A1OFBE-DALI	1545 42W/830 DA2 AL MA WH P	42	5000
4146869	A1OFBF-DALI	1545 42W/840 DA2 AL MA WH P	42	5000
	A1OFBG-DALI	1545 58W/830 DA2 AL MA WH P	58	7000
4146870	A1OFBH-DALI	1545 58W/840 DA2 AL MA WH P	58	7000

Office P Casambi

NO.	CODE		W	LM
	A1OFBA-CA	1245 33W/830 CA AL MA WH P	33	4000
	A1OFBB-CA	1245 33W/840 CA AL MA WH P	33	4000
	A1OFBC-CA	1245 46W/830 CA AL MA WH P	46	5500
	A1OFBD-CA	1245 46W/840 CA AL MA WH P	46	5500
	A1OFBE-CA	1545 42W/830 CA AL MA WH P	42	5000
	A1OFBF-CA	1545 42W/840 CA AL MA WH P	42	5000
	A1OFBG-CA	1545 58W/830 CA AL MA WH P	58	7000
	A1OFBH-CA	1545 58W/840 CA AL MA WH P	58	7000
	A1OFBI-CA	1245 33W/TW CA AL MA WH P	33	4000
	A1OFBJ-CA	1245 46W/TW CA AL MA WH P	46	5500
	A1OFBK-CA	1545 42W/TW CA AL MA WH P	42	5000
	A1OFBL-CA	1545 58W/TW CA AL MA WH P	58	7000

Office P ActiveAhead

NO.	CODE		W	LM
	A1OFBA-AA	1245 33W/830 AA AL MA WH P	33	4000
	A1OFBB-AA	1245 33W/840 AA AL MA WH P	33	4000
	A1OFBC-AA	1245 46W/830 AA AL MA WH P	46	5500
	A1OFBD-AA	1245 46W/840 AA AL MA WH P	46	5500
	A1OFBE-AA	1545 42W/830 AA AL MA WH P	42	5000
	A1OFBF-AA	1545 42W/840 AA AL MA WH P	42	5000
	A1OFBG-AA	1545 58W/830 AA AL MA WH P	58	7000
	A1OFBH-AA	1545 58W/840 AA AL MA WH P	58	7000
	A1OFBI-AA	1245 33W/TW AA AL MA WH P	33	4000
	A1OFBJ-AA	1245 46W/TW AA AL MA WH P	46	5500
	A1OFBK-AA	1545 42W/TW AA AL MA WH P	42	5000
	A1OFBL-AA	1545 58W/TW AA AL MA WH P	58	7000