



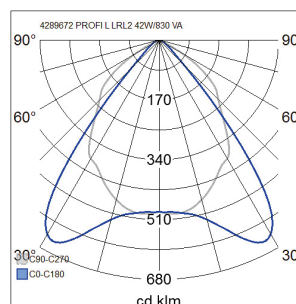

# Profi L

A luminaire range designed for offices and other public spaces. Available in two housing lengths and widths. The range includes two colour temperatures and several output options. You can choose from models with one or two matte anti-glare shields. Suspension or surface mounting.

- Steel housing, aluminium anti-glare shield, matt.
  - White, RAL 9003.
  - Protection class I.
  - Suspension or surface mounting.
  - Linkable 3 x 2,5 mm<sup>2</sup>, Dali-models 5 x 2,5 mm<sup>2</sup>.
  - Integrated LED 19–58 W, 2250–7200 lm.
  - Colour temperatures 3000 K and 4000 K. CRI > 80 / Ra > 80.
  - MacAdam 3 SDCM.
  - IP20.
  - The standard range includes on/off and Dali models.
  - Ambient temperature range 0 ... 25 °C.
  - Rated lifetime L70 100 000 h (Ta25°C).
  - Rated lifetime L80 80 000 h (Ta25°C).
  - Power source service life 50 000 h.
  - Wire-suspension fixture 4146595 and 4107113 are available as an accessory.
  - WH = white, DA = Dali.
- Also available with Casambi, 1–10 V and push-button control (230V). CRI > 90 available for order. Also available with various connecting wire solutions and a pull switch (on/off and Dali).

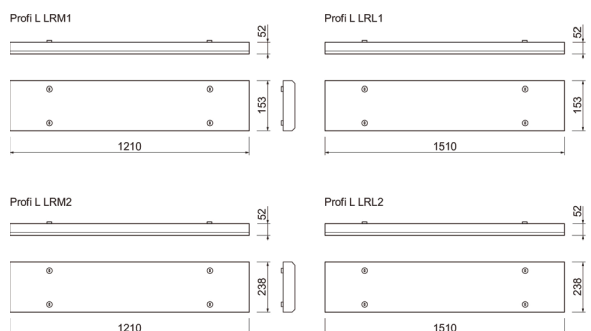

Wire-suspension fixture 4146595 and 4107113 are available as an accessory.

By order, • In stock

## Profi L

NO.	CODE	W	LM
4289666	D2PRAA 1210x153 IP20 19W/830 AL MA WH	19	2250
4289667	D2PRAB 1210x153 IP20 19W/840 AL MA WH	19	2250
4289668	D2PRBA 1510x153 IP20 30W/830 AL MA WH	30	3500
4289669	D2PRBB 1510x153 IP20 30W/840 AL MA WH	30	3500
4289670	D2PRCA 1210x238 IP20 37W/830 AL MA WH	37	4450
• 4289671	D2PRCB 1210x238 IP20 37W/840 AL MA WH	37	4450
4289672	D2PREA 1510x238 IP20 41W/830 AL MA WH	41	5350
• 4289673	D2PREB 1510x238 IP20 41W/840 AL MA WH	41	5350
4289674	D2PREG 1510x238 IP20 58W/830 AL MA WH	58	7200
• 4289675	D2PREH 1510x238 IP20 58W/840 AL MA WH	58	7200

## Profi L Dali

NO.	CODE	W	LM
	D2PRAA-DALI 1210x153 IP20 19W/830 DA AL MA WH	19	2250
	D2PRAB-DALI 1210x153 IP20 19W/840 DA AL MA WH	19	2250
	D2PRBA-DALI 1510x153 IP20 30W/830 DA AL MA WH	30	3500
	D2PRBB-DALI 1510x153 IP20 30W/840 DA AL MA WH	30	3500
	D2PRCA-DALI 1210x238 IP20 37W/830 DA AL MA WH	37	4450
	D2PRCB-DALI 1210x238 IP20 37W/840 DA AL MA WH	37	4450
	D2PREA-DALI 1510x238 IP20 41W/830 DA AL MA WH	41	5350
	D2PREB-DALI 1510x238 IP20 41W/840 DA AL MA WH	41	5350
	D2PREG-DALI 1510x238 IP20 58W/830 DA AL MA WH	58	7200
	D2PREH-DALI 1510x238 IP20 58W/840 DA AL MA WH	58	7200