
IP20 | 3 x 2,5 | 5 x 2,5 | DALI-2 | 5 year guarantee


Puck



A stylish and eye-catching luminaire range for public spaces. This luminaire, which is available in three sizes and two colour temperatures, is ideal for offices and lobbies. Suspension or surface mounting. A wire-suspension fixture is available as an accessory.

- Aluminium housing and opal acrylic diffuser.
- White, RAL 9003.
- Protection class I.
- Suspension or surface mounting.
- Linkable, 3/5 × 2.5 mm^2.
- Installation height 2–6 m
- Integrated LED 28–78 W / 3,300–8,000 lm.
- Colour temperatures 3000 K and 4000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- The standard range includes on/off and Dali models.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100 000 h (Ta25°C).
- Rated lifetime L80 80 000 h (Ta25°C).
- WH = white, DA = Dali.
- Also available as Casambi, 1–10 V and Switch Dim solutions. Opal prismatic diffuser available by special order. Project-specific luminous flux packages available on request. CRI > 90 available by special order. Also available with various connecting wire solutions and in different RAL colors.

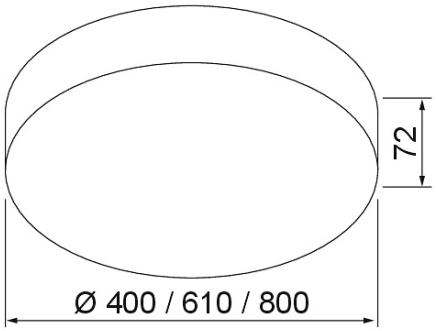



By order

Puck

NO.	CODE		W	LM
4245258	D2EXAB	400 IP20 28W/840 ACO WH	28	3300
4245257	D2EXAA	400 IP20 28W/830 ACO WH	28	3300
4245262	D2EXAD	400 IP20 41W/840 ACO WH	41	4700
4245261	D2EXAC	400 IP20 41W/830 ACO WH	41	4700
4146553	D2EXDA	610 IP20 48W/840 ACO WH	48	5900
4146554	D2EXDB	610 IP20 48W/830 ACO WH	48	5900
4245266	D2EXCB	800 IP20 78W/840 ACO WH	78	8000
4245265	D2EXCA	800 IP20 78W/830 ACO WH	78	8000

Puck Dali

NO.	CODE		W	LM
4245260	D2EXBB	400 IP20 28W/840 DA ACO WH	28	3300
4245259	D2EXBA	400 IP20 28W/830 DA ACO WH	28	3300
4245264	D2EXBD	400 IP20 41W/840 DA ACO WH	41	4700
4245263	D2EXBC	400 IP20 41W/830 DA ACO WH	41	4700
4146555	D2EXDC	610 IP20 48W/840 DA ACO WH	48	5900
4146556	D2EXDD	610 IP20 48W/830 DA ACO WH	48	5900
4245268	D2EXCD	800 IP20 78W/840 DA ACO WH	78	8000
4245267	D2EXCC	800 IP20 78W/830 DA ACO WH	78	8000

Puck Accessories

NO.	CODE	
4245269	D2EXXA	400 Wire suspension ON/OFF
4146557	D2EXXE	610 Wire suspension ON/OFF
4245271	D2EXXC	800 Wire suspension ON/OFF
4245270	D2EXXB	400 Wire suspension DALI
4146558	D2EXXF	610 Wire suspension DALI
4245272	D2EXXD	800 Wire suspension DALI

