



Softy

A panel luminaire with a lighting micro-prismatic diffuser in the middle for offices and other public spaces. The opal diffuser on the sides provides background lighting. Recessed mounting on a T-grid ceiling or, with accessories, on a plasterboard ceiling. Also suitable for surface mounting.

- Steel housing.
- Acrylic diffusers (AC). A micro-prismatic diffuser (MP) in the middle and opal diffusers (O) on the sides.
- White RAL 9016.
- Protection class I.
- Surface and recessed mounting.
- Linkable, 3/5 x 2.5 mm²
- Installation height 2–4 m.
- Fixed LED: 33–49 W / 3,200–4,300 lm.
- Colour temperatures 3,000 K and 4,000 K
CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- The standard range includes on/off and Dali-2 models.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100,000 h (Ta25°C).
- Rated lifetime L80 65,000 h (Ta25°C).
- Power source lifespan: 100,000 h.
- WH = white, DA2 = Dali-2.
- Accessories: A surface mounting frame (4222798) and recessed mounting frame (4297811).
- Also available as Casambi and Switch Dim solutions.
CRI > 90 available by special order. The colour temperature options available are: 2,700 K, 5,700 K and 6,500 K as well as Tunable White. Also available with various connecting wire solutions.

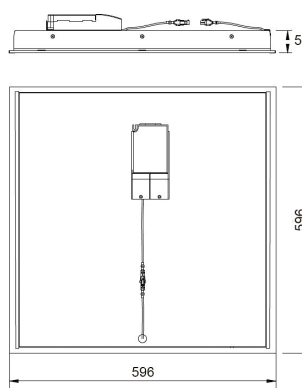

By order

Softy


NO.	CODE	W	LM
4222790	D2SOAA IP20 33W/830 ACO/MP WH	33	3200
4222791	D2SOAB IP20 33W/840 ACO/MP WH	33	3200
4222794	D2SOAC IP20 49W/830 ACO/MP WH	49	4300
4222795	D2SOAD IP20 49W/840 ACO/MP WH	49	4300

Softy Dali

NO.	CODE	W	LM
4222792	D2SOBA IP20 33W/830 DA2 ACO/MP WH	33	3200
4222793	D2SOBB IP20 33W/840 DA2 ACO/MP WH	33	3200
4222796	D2SOBC IP20 49W/830 DA2 ACO/MP WH	49	4300
4222797	D2SOBD IP20 49W/840 DA2 ACO/MP WH	49	4300



4222798
Surface mounting
frame



4297811
Recessed mounting
frame