




Sport

Sports facilities luminaire Sport is a made of high-quality materials for high spaces. In the design of the luminaire, we have listened the wishes of our customers as much as possible. The traditional ball protection grid has been replaced with a clear polycarbonate reflector, which gives the light distribution very evenly over the illuminated area. Luminaires pull-out connection strip and integrated surface mounting brackets make installation very easy. The surface mounting brackets are slotted to fit the most common suspension rails. The high-quality reflector material and strong steel frame safely absorb impacts from all directions. Sport is ball protection tested as required by the VDE 0710-13 standard. The 100% Finnish Sport luminaires are designed and manufactured at Airam's factory in Lahti.


- Steel housing, polycarbonate reflector, 60 and 90 degree lenses.
- White, RAL 9016.
- Protection class I.
- Surface mounting to the ceiling.
- Linkable 5 x 2,5 mm².
- Installation height 4–10 m.
- Integrated LED 56–150 W: 10 000–24 000 lm.
- Colour temperature 4000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK10.
- Ball Protection certificate VDE 0710-13.
- On/off and Dali-2, with direct pushbutton control 230 V.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L80B10 100 000 h (Ta25°C).
- Casambi models and customised luminous flux packages are available on a project-specific basis. Through-wiring, different lense options and RAL Classic colours for the housing are available to order.

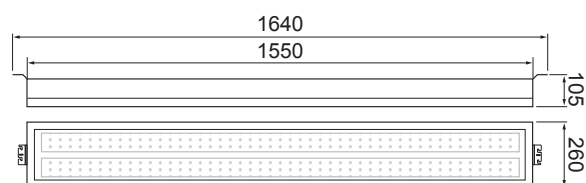

The pull-out connection strip speeds up installation.



Integrated surface mounting brackets make installation very easy.



By order

Sport

NO.	CODE		W	LM
4147068	100234	10000lm 840 90D PCC WH	56	10000
4147069	100235	14000lm 840 90D PCC WH	79	14000
4146934	A1SRAA	18000lm 840 60D PCC WH	105	18000
4146935	A1SRAB	20000lm 840 60D PCC WH	119	20000
4146936	A1SRAC	24000lm 840 60D PCC WH	148	24000

Sport Dali

NO.	CODE		W	LM
4147070	100233	10000lm 840 90D DA2 PCC WH	56	10000
4147071	100236	14000lm 840 90D DA2 PCC WH	79	14000
4146937	A1SRAA-DALI	18000lm 840 60D DA2 PCC WH	106	18000
4146938	A1SRAB-DALI	20000lm 840 60D DA2 PCC WH	120	20000
4146939	A1SRAC-DALI	24000lm 840 60D DA2 PCC WH	150	24000