





Target M

Target M offers an ideal spotlight solution for retail premises. This luminaire offers high-quality illumination and excellent colour rendering properties. Its Premium White feature is specifically designed for in-store spot and accent lighting. The feature enhances colour contrasts, emphasising white colour tones. The luminaire is equipped with an almost inconspicuous ballast that is integrated into a three-phase rail. Thanks to its versatility, this luminaire offers a wide range of lighting options for retail spaces as it is easy to move and adjust. Suitable applications include fashion and clothing retail premises, museums and other public spaces.

- Die-cast aluminium housing. Polycarbonate diffuser. Adjustable and rotating, bevelled aluminium reflector 36°. Options 15°, 25° and 60° as accessories.
- Powder-coated, white, RAL 9003 and black, RAL 9005.
- Protection class I.
- Mounting on a three-phase contact rail. Dali-2 models on a Dali contact rail.
- Compatible three-phase contact rails: Global Trac Pro and Stucchi OneTrack.
- Compatible Dali contact rails: Nordic Aluminium Global Pulse and Stucchi OneTrack.
- Installation height 3–6 m.
- Colour temperatures 3,000 K and 4,000. CRI > 90 / Ra > 90.
- IP20.
- IK02.
- Integrated LED 21 W / 2580 lm (930), 2750 lm (940).
- MacAdam 3 SDCM.
- On/off and Dali-2.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L80 50,000 h (Ta25°C).
- Project-specific luminous flux packages are available with luminous fluxes of up to 3680 lm (CRI > 90). The following colour temperatures from the Philips Fortimo SLM range are available: 827, 830, 840, 850, 857, 927 and 930. Premium White is available in colour temperatures 830 and 935. In addition, we offer solutions optimised for fresh meat (FoodPremiumRed) and fruit and vegetables (FoodWarmWhite). The available reflector options: 15°, 25°, 36° and 60°. The available control options are Dali -2 and Casambi.

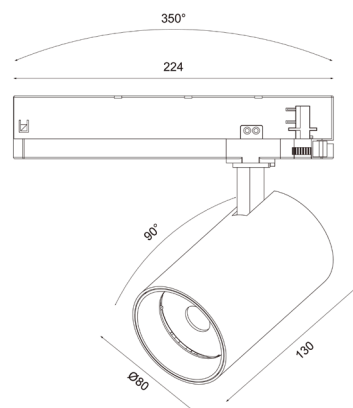

By order, • In stock

Target M

NO.	CODE		W	LM
• 4146583	A1TATA	IP20 21W/940 2750lm 36D WH	21	2750
4146584	A1TATB	IP20 21W/930 2580lm 36D WH	21	2580
• 4146585	A1TATC	IP20 21W/940 2750lm 36D BK	21	2750
4146586	A1TATD	IP20 21W/930 2580lm 36D BK	21	2580

Target M Dali

NO.	CODE		W	LM
	A1TATA-DALI	IP20 21W/940 2750lm 36D DA2 WH	21	2750
	A1TATB-DALI	IP20 21W/930 2580lm 36D DA2 WH	21	2580
	A1TATC-DALI	IP20 21W/940 2750lm 36D DA2 BK	21	2750
	A1TATD-DALI	IP20 21W/930 2580lm 36D DA2 BK	21	2580

Target M Accessories

NO.	CODE	
	A1TATM	Reflector M 15°
	A1TATN	Reflector M 25°
	A1TATO	Reflector M 60°