


Vario D/I

Developed and manufactured in Finland, Vario D/I is a surface-mounted aluminium profile luminaire with downlight and uplight features. The material used in the body is 100% recycled aluminum. Thanks to the variety of housing lengths and corner pieces, you can create a customised lighting solution that meets your needs. Typical applications include offices, lobbies, educational institutions and corridors. With this luminaire, you can create a seamless line of light of up to 4,500 mm. The 100% Finnish Vario D/I luminaires are designed and manufactured at Airam's factory in Lahti.

- Aluminium housing and acrylic diffuser; microprism or opal.
- White, RAL 9016.
- Protection class I.
- Suspension mounting. Connection in a separate box.
The luminaire will be delivered with a two-meter connection cable (5 x 0,75 mm²). The length of the wire is 1500 mm.
- Opal:
 - 1140 mm: 33 W / 4200 lm.
 - 1420 mm: 45 W / 6000 lm.
 - 4500 mm: 119 W / 16 700 lm.
- Microprism:
 - 1140 mm: 33 W / 4200 lm.
 - 1420 mm: 45 W / 6000 lm.
 - 4500 mm: 119 W / 16 700 lm.
- Diffused light 70/30 as a standard feature. Downlight 30%.
Downlight and uplight controlled separately.
- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off and Dali-2 models, with push-button control (230V).
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 > 100 000 h (Ta25°C).
- Rated lifetime L80 100 000 h (Ta25°C).
- Power source service life 100,000 h.
- WH = white DA2 = Dali-2, ACO = opal acrylic,
ACMP = acrylic microprism, D/I = downlight and uplight.

- Casambi and ActiveAhead models are available on a project-specific basis. You can also have a luminous flux package customised to your needs. Through-wiring, customised input locations, cut-to-measure cables with quick connectors and various quick-connector cable sets are available by special order. The colour temperature options available are 3000 K and Tunable White. CRI > 90 / Ra > 90 also available.

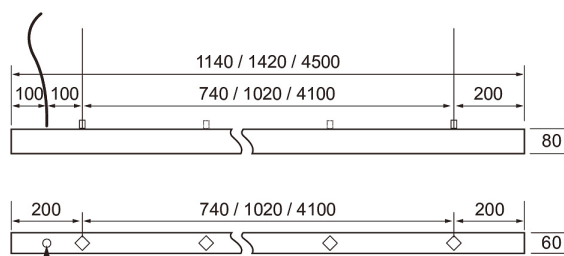


Fast installation with the hanging wire.




RAL Classic colours for the housing are available by order.


RAL Classic colours for the housing are available to order. Different linear light solutions are available. Various lengths ranging from 600 mm to 4500 mm are also available by order. Available also with pull dim.



Vario D/I ACO



Vario D/I ACMP



Vario P ACMP

By order

Vario D/I ACO

NO.	CODE		W	LM
4146903	A1VATB	1140 33W/840 ACO WH D/I	33	4200
4146904	A1VATD	1420 45W/840 ACO WH D/I	45	6000
4146905	A1VATF	4500 119W/840 ACO WH D/I	119	16700

Vario D/I ACMP

NO.	CODE		W	LM
4146906	A1VATH	1140 33W/840 ACMP WH D/I	33	4200
4146907	A1VATJ	1420 45W/840 ACMP WH D/I	45	6000
4146908	A1VATL	4500 119W/840 ACMP WH D/I	119	16700

Vario D/I Dali ACO

NO.	CODE		W	LM
4146909	A1VATB-DALI	1140 33W/840 ACO DA2 WH D/I	33	4200
4146910	A1VATD-DALI	1420 45W/840 ACO DA2 WH D/I	45	6000
4146911	A1VATF-DALI	4500 119W/840 ACO DA2 WH D/I	119	16700

Vario D/I Dali ACMP

NO.	CODE		W	LM
4146912	A1VATH-DALI	1140 33W/840 ACMP DA2 WH D/I	33	4200
4146913	A1VATJ-DALI	1420 45W/840 ACMP DA2 WH D/I	45	6000
4146914	A1VATL-DALI	4500 119W/840 ACMP DA2 WH D/I	119	16700

Vario D/I ACMP

SNRO	KOODI		W	LM
	A1VAUA	1460 40W/830 ACMP 1PD WH D/I	40	5400
	A1VAUB	1460 49W/830 ACMP 2PD WH D/I	49	6200

Vario pull dim -versions

The pendant luminaire Vario D/I PD WH is available in 2 versions. 1 pull dim (1PD) for combined dimming of up/down light and 2 pull dim (2PD) where up and down lights are controlled separately. Length 1460 mm. The light distribution is 60 % up and 40 % down and 50 % up and 50 % down in the standard version.

- 1 PD 1460 mm: 40 W / 5400 lm / As standard, diffused light 40/60 / Upward light 60%.
- 2 PD 1460 mm: 49 W / 6200 lm / As standard, diffused light 50/50 / Upward light 50%.

