


Vario P

Developed and manufactured in Finland, Vario P is a suspension-mounted aluminium profile luminaire. The material used in the body is 100% recycled aluminum. Thanks to the variety of housing lengths and corner pieces, you can create a customised lighting solution that meets your needs. Typical applications include offices, lobbies, educational institutions and indoor corridors. With this luminaire, you can create a seamless line of light of up to 4500 mm. The DO series models are an excellent choice for all types of spaces where low glare levels and precisely controlled light distribution are required. The DO models are designed with user comfort in mind, ensuring that light is distributed evenly and discreetly onto the illuminated area. The 100% Finnish Vario P luminaires are designed and manufactured at Airam's factory in Lahti.

- Aluminium housing and acrylic diffuser; microprism (ACMP), opal (ACO) or deep optic (DO).
- White, RAL 9016.
- Protection class I.
- Suspension mounting. Connection in a separate box. The luminaire will be delivered with a two-meter connection cable (3/5 x 0,75 mm²). The length of the wire is 1500 mm.
- Microprism:
 - 1140 mm: 24 W / 3100 lm.
 - 1420 mm: 30 W / 3900 lm.
 - 4500 mm: 92 W / 12 500 lm.
- Opal:
 - 1140 mm: 24 W / 3100 lm.
 - 1420 mm: 30 W / 3900 lm.
 - 4500 mm: 92 W / 12 500 lm.
- Deep optic:
 - 1140 mm / 25 W: WH/WH / 4600 lm. WH/BK 4000 lm.
 - 1420 mm / 31 W: WH/WH / 5800 lm. WH/BK 5000 lm.
- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off and Dali-2 models, with push-button control (230V).
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 > 100 000 h (Ta25°C).
- Rated lifetime L80 100 000 h (Ta25°C).
- Power source service life 100,000 h.
- WH/WH = white housing + white diffuser, WH/BK = white housing + black diffuser, 80D = 80 degree lenses.

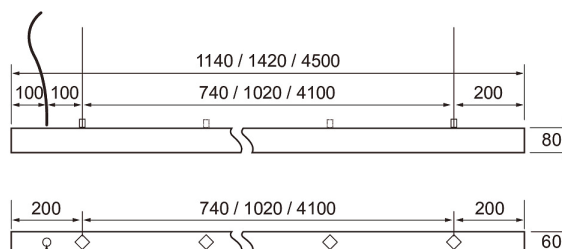


Quick installation using the surface mounting bracket.



RAL Classic colours for the housing are available by order.


- Casambi and ActiveAhead models are available on a project-specific basis. You can also have a luminous flux package customised to your needs. Through-wiring, customised input locations, cut-to-measure cables with quick connectors and various quick-connector cable sets are available by special order. The colour temperature options available are 3000 K and Tunable White. CRI > 90 / Ra > 90 also available. RAL Classic colours for the housing are available to order. Different linear light solutions are available. Various lengths ranging from 600 mm to 4500 mm are also available by order.



Vario P ACMP




ACMP WH



Vario P ACO



ACO WH



Vario P DO



DO WH/BK

Vario Deep Optic – minimal glare values and discreet lighting

Vario DO luminaires are the perfect choice for all spaces where minimal glare values and discreet lighting are desired. The luminaire is particularly suitable for lighting office spaces, educational institutions, and other public spaces. The luminaires are designed with user comfort in mind; high-quality lenses and glare protection ensure that the light is evenly and discreetly distributed over the illuminated area.

By order

Vario P ACMP

NO.	CODE		W	LM
4146894	A1VASH	1140 24W/840 ACMP WH P	24	3100
4146895	A1VASJ	1420 30W/840 ACMP WH P	30	3900
4146896	A1VASL	4500 92W/840 ACMP WH P	92	12500

Vario P ACO

NO.	CODE		W	LM
4146891	A1VASB	1140 24W/840 ACO WH P	24	3100
4146892	A1VASD	1420 30W/840 ACO WH P	30	3900
4146893	A1VASF	4500 92W/840 ACO WH P	92	12500

Vario P DO

NO.	CODE		W	LM
4147002	A1VADI	1140 25W/840 DO/80D WH/WH	25	4600
4147003	A1VADJ	1140 25W/840 DO/80D WH/BK	25	4000
4147004	A1VADK	1420 31W/840 DO/80D WH/WH	31	5800
4147005	A1VADL	1420 31W/840 DO/80D WH/BK	31	5000

Vario P Dali ACMP

NO.	CODE		W	LM
4146900	A1VASH-DALI	1140 24W/840 ACMP DA2 WH P	24	3100
4146901	A1VASJ-DALI	1420 30W/840 ACMP DA2 WH P	30	3900
4146902	A1VASL-DALI	4500 92W/840 ACMP DA2 WH P	92	12500

Vario P Dali ACO

NO.	CODE		W	LM
4146897	A1VASB-DALI	1140 24W/840 ACO DA2 WH P	24	3100
4146898	A1VASD-DALI	1420 30W/840 ACO DA2 WH P	30	3900
4146899	A1VASF-DALI	4500 92W/840 ACO DA2 WH P	92	12500

Vario P Dali DO

NO.	CODE		W	LM
4147006	A1VADM	1140 25W/840 DO/80D DA2 WH/WH	25	4600
4147007	A1VADN	1140 25W/840 DO/80D DA2 WH/BK	25	4000
4147008	A1VADO	1420 31W/840 DO/80D DA2 WH/WH	31	5800
4147009	A1VADP	1420 31W/840 DO/80D DA2 WH/BK	31	5000