


Norma CSP 24V


The high-quality Norma CSP led strip is an excellent lighting solution for spaces that require uniform and indirect lighting. CSP LEDs do not have point-like light, but give a completely flat, clean and uniform line of light. Thanks to the even light, the LED strip is also suitable for locations where the strip and profile are directly visible. The Norma strip has IP68, so it can also be installed in damp rooms. The series has excellent colour rendering and three colour temperature options. The strip is to be installed in an aluminum profile. A separate dimmer unit offers two control options: push button (Push dim) and Dali dimming control. By special request, the luminaire is available with the Casambi control system, cut to measure and installed inside a profile, when necessary. Easy-to-install connectors are available as accessories.

- LED strip 24V, cut every 50 mm.
- Protection class III.
- Length 5 m.
- The maximum length of the continuous line of light 8 m.
- 3 m supply cable at both ends.
- Mounting on an aluminium profile.
- Colour temperatures 2700 K, 3000 K and 4000 K.
- CRI > 90 / Ra > 90.
- MacAdam 3 SDCM.
- IP68.
- 14,4 W/1400 lm/m.
- On/off, Push dim, Dali.
- Ambient temperature range -30 ... 25 °C.
- Rated life time L70 50 000 h (Ta25°C).
- Also available with the Casambi control system on a project-specific basis. Can also be cut to measure and installed in a profile, when necessary.

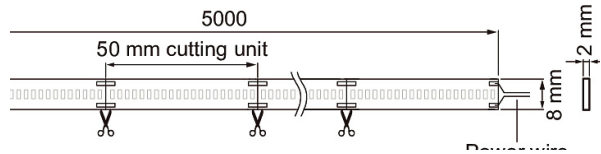

CSP LED - uniform and high quality lighting!

The new CSP technology of led strips brings great quality-improving features to led strips. In addition to point-free light, the new technology is more resistant to bending and thermal expansion.



• In stock

Norma CSP 24V

NO.	CODE		W	LM
• 4146925	A1COBI	24V IP68 1400lm/m 927 5m	70	7000
• 4146926	A1COBJ	24V IP68 1400lm/m 930 5m	70	7000
• 4146927	A1COBK	24V IP68 1400lm/m 940 5m	70	7000

Norma CSP 24V Accessories

NO.	CODE	
• 4146929	A1COBM	24V IP68 Connector 8mm 3m 5pcs
• 4146931	A1COBO	24V IP68 Connector 8mm 5pcs



4209552



4209554