

Apus 24V



Apus 24V is a high-quality and energy-efficient LED strip with excellent color rendering. The Apus strip creates a uniform line of light and offers numerous options for implementing indirect lighting. The long 15-meter model of the series allows for a continuous installation, which can be utilized in corridors and other locations requiring long installations, especially in public spaces. Applications include kitchens, living spaces, hotels, and restaurants. The series offers four different power levels with two color temperatures. By selecting the appropriate power supply, you can adjust the dimming of the LED strip as desired. It is also available with Casambi control, cut to length, and installed in a profile if necessary – customization is smoothly carried out at our factory in Lahti. The series includes accessories that make it easy to connect the strips. Both ends of the strip have a power cord, allowing you to create two ready-to-install LED strips by cutting it. The length of the power cord (3 meters) also allows the power supply to be placed in a discreet location.

- LED strip 24V, cut every 125 mm, 62,5 mm or 50 mm depending on the power.
- Protection class III.
- Length 5 m / 15 m.
- 3 m supply cable at both ends.
- Mounting on an aluminium profile.
- Colour temperatures 3000 K and 4000 K. CRI > 90 / Ra > 90.
- MacAdam 3 SDCM.
- IP20.
- 5 m models: 600 lm/m 4,8 w/m, 1200 lm/m 9,6 W/m, 1700 lm 14,4 W/m. 15 m model: 900 lm/m 9,6 W/m.
- On/off, Push dim, Dali.
- Ambient temperature range 0 ... 25 °C.
- Accessories: 4147018 24V IP20 Connector 10 mm 3 m 5 pcs.
- Rated life time L70 50 000 h (Ta25°C).
- Also available with the Casambi control system on a project-specific basis. Can also be cut to measure and installed in a profile, when necessary.

In stock

Apus 24V

NO.	CODE		W/m	LM/m
• 4147010	A1APUA	24V IP20 600lm/m 930 5m	4,8	560
• 4147011	A1APUB	24V IP20 600lm/m 940 5m	4,8	600
• 4147012	A1APUC	24V IP20 1200lm/m 930 5m	9,6	1130
• 4147013	A1APUD	24V IP20 1200lm/m 940 5m	9,6	1200
• 4147014	A1APUE	24V IP20 1700lm/m 930 5m	14,4	1610
• 4147015	A1APUF	24V IP20 1700lm/m 940 5m	14,4	1730
• 4147016	A1APUG	24V IP20 900lm/m 930 15m	9,6	880
• 4147017	A1APUH	24V IP20 900lm/m 940 15m	9,6	900

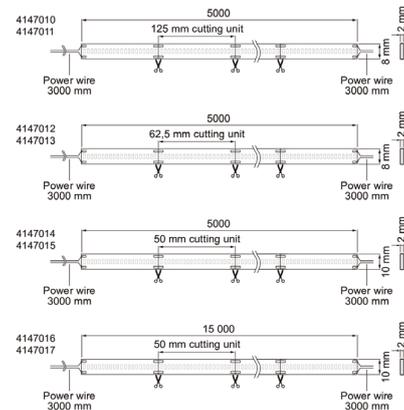

Accessory
4147018 Apus 24V IP20
Liitin 10 mm 3 m 5 kpl

